

# AURORA<sup>®</sup>

L I G H T I N G   G R O U P

S M A R T   L I G H T I N G   S O L U T I O N S



**Aone**<sup>™</sup>  
SMART LIGHTING SPACES

 **connect.**  
**control**<sup>™</sup>

Controlled via  
 **Bluetooth**<sup>®</sup>

T R A D E   2 0 2 1   N E W   P R O D U C T S



**NEW**

AOOne.light  
5



Tuneable White Fire Rated

**NEW**

AOOne.light  
7



RGB+Tuneable White

**NEW**

AOOne.light  
9



GU10 Lamp Kit

**NEW**

AOOne.light  
9



E27 GLS Lamp Kit

**NEW**

AOOne.light  
9



B22 GLS Lamp Kit

**NEW**

AOOne.light  
11



3m RGB+Tuneable White Strip Kit

**NEW**

AOOne.light  
11



5m RGB+Tuneable White Strip Kit

**NEW**

AOOne.light  
13



RGB+Tuneable White GU10

**NEW**

AOOne.light  
14



RGB+Tuneable White GLS

**NEW**

AOOne.light  
15



RGB+Tuneable White Candle

**NEW**


AOOne.control  
17



Battery Rotary Controller

## Why choose connect.control™ Bluetooth solution?

- Works straight out of the box
- An internet connection is not required
- Reliable and local wireless technology
- Cost effective smart solution for the home
- Featuring Bluetooth 4.2 protocol for high speed control
- Aurora BLE App available for extra functionality control

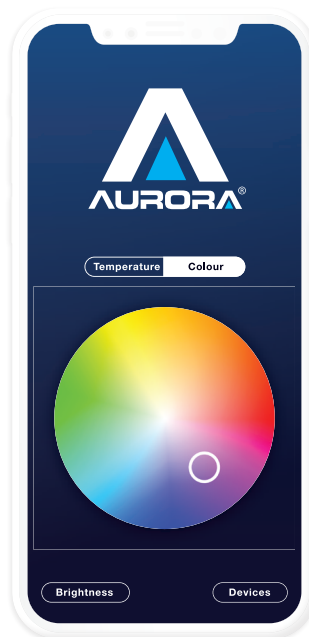



# NEW Product Range Finder

**NEW**

**X7**  
22



7W IP65 Fixed

**NEW**

**CX7**  
23



7W IP65 Colour Switchable Fixed

**Warranty Upgraded**

**A6<sup>PRO</sup>**  
25



6W IP65 Fixed/Adjustable

**Warranty Upgraded**

**A6<sup>™</sup>**  
26



6W IP65 Fixed/Adjustable

**Warranty Upgraded**

**A4<sup>™</sup>**  
27



4W IP65 Fixed/Adjustable

**Warranty Upgraded**

**mPRO<sup>™</sup>**  
29



6W IP65 Fixed/Adjustable

**Warranty Upgraded**

**Primo<sup>™</sup>**  
30-31



11W IP65/GU10 Standard/Trimless

**NEW**

**CurveE<sup>PRO</sup>**  
32



15W IP44 Fixed Baffle

**NEW**

**ReflectCS<sup>™</sup>**  
35



13-35W Colour Switchable SMD

**NEW**

**ClearVu<sup>™</sup>**  
36



3.5W GU10

**NEW**


**EdgeLite<sup>PRO</sup>**  
40-41



26-40W IP44 Flat Panels

**NEW**

**DuoLiteCS**  
43



36W Colour Switchable Troffer

**Warranty Upgraded**

**LinearPac<sup>™</sup>**  
45



20-70W IP65 Anti Corrosive

**NEW**

**BatPac<sup>PRO</sup>CS**  
47



20-65W Colour Switchable Battens

**NEW**

**Hydro-Link<sup>™</sup>**  
48



38-55W IP66 Anti-Corrosives

**NEW**

**Cosmos<sup>™</sup>**  
52



100-200W IP65 Highbay

**NEW**

**Klay<sup>™</sup>**  
56



10-18W IP65 Fixed Up/Down

**NEW**

**WalzCS**  
58



4W Low-Level

**NEW**

**LEDline<sup>™</sup>COB**  
60



24V COB Ultra Bright LED Strip

**NEW**

**LEDline<sup>™</sup>COB**  
61



24V IP67 COB Ultra Bright LED Strip

**NEW**

**LEDline<sup>PRO</sup>**  
62



24V Ultra Bright LED Strip

**NEW**

**LEDline<sup>PRO</sup>**  
63



24V IP67 Ultra Bright LED Strip

**NEW**

**Power**  
64



24W - 60W IP67 12V/24V

**NEW**

**Emergency**  
70



3W Emergency Downlight

**NEW**

**Emergency**  
70



Emergency Pack

Fire Rated & Downlights  
Pg.18-37

Panels & Linears  
Pg.38-49

Highbay  
Pg.50-53

Wall Lights, Strip & Emergency  
Pg.54-71



## STARTER KITS



**GU10 LAMP KITS**



**E27 & B22 GLS LAMP KITS**



**3M & 5M LED STRIP KITS**

## ADDITIONAL DEVICES



ADD UP TO  
**64**  
DEVICES



### LEVEL 1 STARTER KITS

If you are planning to smarten one room with some feature lighting, connect.control<sup>™</sup> Starter Kits offer you this option with immediate control.

- Select from five preset lighting scenes
- Recall six RGB colours to suit your mood
- Adjust colour temperature between warm and cool white
- Control brightness

### LEVEL 2 ADDITIONAL DEVICES

You have purchased a Starter Kit with GLS Lamps, you can also add GU10 Lamps or Downlights to your system.

Bluetooth connect.control<sup>™</sup> lamps can be purchased separately and connect straight out of the box, for control with the same remote as used in the Starter Kit, without additional setup.

All lights function simultaneously, meaning that if a specific scene is selected, all lights will move to that scene.

If the lights only have colour temperature control then the preset scenes will automatically set these lights to a predefined colour temperature and brightness rather than RGB colour.

## FOUR LEVELS OF WIRELESS LIGHTING CONTROL

## SET SCENES & SCHEDULES FOR VERSATILE, ADVANCED CONTROL



LOCAL CONTROL IN YOUR **LOUNGE**



WALL CONTROL IN YOUR **KITCHEN**




DEDICATED TO **YOUR DOWNTIME**

### LEVEL 3 DEDICATED CONTROLLERS

You want to add more lights in multiple rooms or outdoors, with separate controllers to control each space.

It is possible to group a specific remote or battery dimmer with a group of lights without touching the App. This stops any interference if you plan to use connect.control™ lights in more than one room. You can also use a remote controller and battery dimmer in the same group, enabling a wall control solution too.

For further details about grouping controllers and specific groups of lights together please visit our website, which has links to our step by step videos.

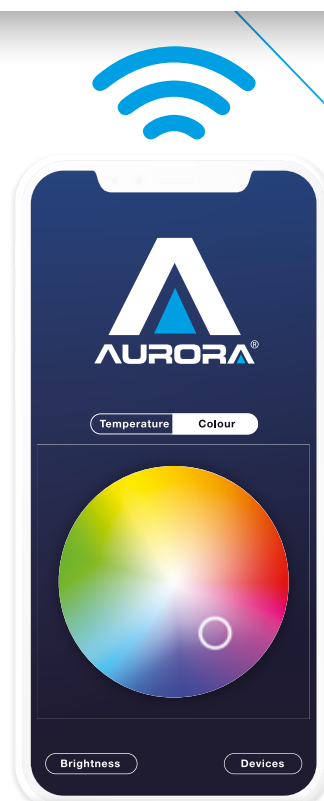

Watch Video



EDIT **SCENES**



SYNC **MUSIC**



SET **SCHEDULES**

### LEVEL 4 APP CONTROL

You would like to access more advanced features, available within the FREE to download Aurora BLE app.

The app allows scene editing, either adjusting specific light settings or for all lights in the chosen room. Create schedules to suit your routines by choosing the time and days to repeat. For those vibrant occasions, we have included music mode, which enables your lighting to sync with the rhythm of music.

**connect.control™** - simplifying your smart lighting journey.

Visit [auroralighting.com/connect.control](http://auroralighting.com/connect.control) to learn more







## Bluetooth Tuneable White Fixed Downlight

The ultimate smart fire rated lighting upgrade! Immediate control out of the box with connect.control™ functionality, fully compatible with the rest of the range. An ideal solution for any residential, hospitality or commercial environment.


### Application Overview

## COOL MORNINGS, WARM EVENINGS

### TRIGGERING SCENES

Recall warm and cool preset scenes depending on the time of day and adjust brightness as desired all through the connect.control™ controllers

Lighting

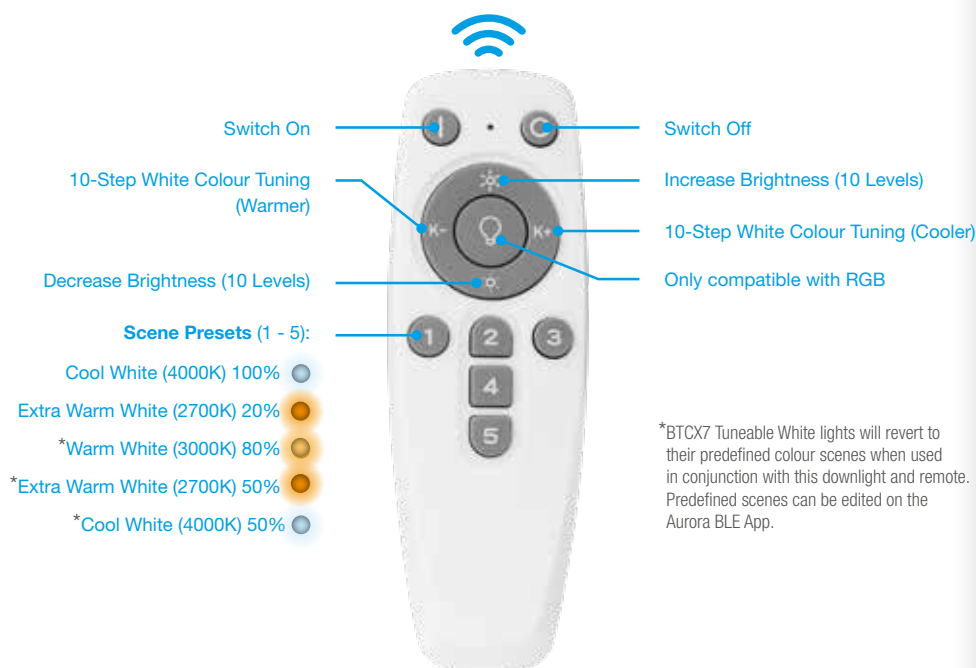

\*BTCX7 Tuneable White lights will revert to their predefined colour scenes when used in conjunction with this downlight and remote. Predefined scenes can be edited on the Aurora BLE App.

### SmartTip

Add downlights into your ceiling to offer high lumen performance functional lighting. Add connect.control™ RGB Tuneable White GLS or Strip to create feature lighting, all controllable from the connect.control™ remote



## One Downlight Multiple Colour Temperatures

Fully dimmable, Colour Tuneable - Matches light output to environment & time of day



2700K

5000K

3 Year Warranty

L70 35,000hrs

On/Off, Dimmable and  
Tuneable White control

IP65 Polycarbonate  
Polished Chrome and  
Satin Nickel bezel options




works with

.control

Bluetooth Remote  
See pg.4



Bluetooth  
Battery Dimmer  
See pg.17

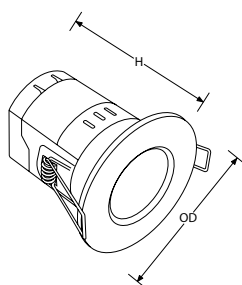

AU-A1BTCX7

(H) 80mm Height  
(OD) 88mm Overall (Ø)

## AOne™.light

connect.control™ BTCX7  
Fire Rated Downlight



Works with the rest of the connect.control range offering white colour tuning

Tuneable White colour temperature between 2700-5000K

5-100% dimming range

Supplied with a IP65 polycarbonate White bezel (IP65 polycarbonate  
Polished Chrome & Satin Nickel bezel finishes sold separately)

60° beam angle

Ability to be controlled individually or within a space

Can be used in lighting scenes, schedules via the app

Works directly with the Aurora BLE App and the connect.control™ remote  
control AU-A1BTRC1 or battery dimmer AU-A1BTR2GW



Bluetooth Tuneable White Fire Rated Downlight  
See Pg. 4 & 17 for information on the connect.control™ Bluetooth controllers

2700K 5000K  
580lm 620lm



30, 60, 90 minutes (Solid Timber Joists)  
30 minutes (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
AU-A1BTCX7	7W	2700-5000K	580-620lm	82	60°	70mm

### Accessories

AU-A1BTRC1\*\* AOne™ connect.control™ Bluetooth Remote

AU-A1BTR2GW\*\* AOne™ connect.control™ Two Gang Wireless Battery Dimmer

### Bezel Options

AU-BZX7\* X7™ Fixed IP65 Polycarbonate Downlight Bezel

\*Add suffix PC or SN for Polished Chrome or Satin Nickel finishes.

\*\*Works with AOne™ connect.control™ devices





# Bluetooth RGB + Tuneable White Fixed Downlight

A simple and cost effective solution to add smart lighting to a hospitality or commercial environment, adding vibrant RGB colour mixing for feature lighting and functional warm to cool tuneable whites with minimal set up

## Application Overview

### CREATE YOUR OWN AMBIENCE

**SIMPLE UPGRADE**  
Aurora's Bluetooth downlight with RGB colour and tuneable white colours offers flexibility throughout the day and night.

**SmartTip**  
Adjust the colour temperatures and brightness during the day and night, to set the right light for the right mood or enable music mode for a vibrant party atmosphere



Lighting

## 3 Step Simple Install



**1**  
**Replace** existing downlight with AOne™ Bluetooth Downlight



**2**  
**Connects** automatically to the connect.control™ controllers



**3**  
**Control** via App or connect.control™ controllers

## One Downlight, RGB + Tuneable White

Fully dimmable, RGB + Tuneable White - Matches light output to environment & time of day



2700K

5000K

"Create millions of colours"



3 Year Warranty

L70 25,000hrs

On/Off, Dimmable, RGB  
and Tuneable White control

White finish




works with

.control

Bluetooth Remote  
See pg.8



Bluetooth  
Battery Dimmer  
See pg.17

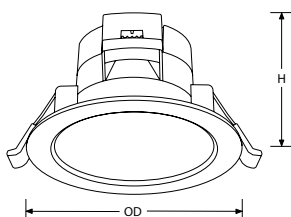

**AU-A1BTD10CW**

(H) 62mm Height  
(OD) 113mm Overall (Ø)

## AOne<sup>TM</sup>.light

connect.control<sup>TM</sup> RGB + Tuneable  
White Fixed Downlight



5-100% dimming range

RGB + tuneable white colour temperature between 2700-5000K

100° beam angle

Ability to be controlled individually or within a space

Can be used in lighting scenes, schedules and music mode via the app

Works directly with the Aurora BLE App and the connect.control<sup>TM</sup>  
remote control AU-A1BTRC1 or battery dimmer AU-A1BTR2GW



Fixed Bluetooth RGB + Tuneable White Downlight

See Pg. 8 & 17 for information on the connect.control<sup>TM</sup> Bluetooth controllers



Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>AU-A1BTD10CW</b>	10W	2700-5000K	800-900lm	80	100°	90mm

### Accessories

**AU-A1BTRC1\*** AOne<sup>TM</sup> connect.control<sup>TM</sup> Bluetooth Remote

**AU-A1BTR2GW\*** AOne<sup>TM</sup> connect.control<sup>TM</sup> Two Gang Wireless Battery Dimmer

\*Works with AOne<sup>TM</sup> connect.control<sup>TM</sup> devices






## Bluetooth RGB + Tuneable White Lamp Kits

A perfect way to begin your Smart Lighting journey.

Using Bluetooth technology, Aurora's connect.control™ product range offers you instant smart lighting control, straight out of the box.

**Connect your light fittings,** turn the remote on and simply begin to control your lights. You can recall 6 RGB colours, trigger 5 pre programmed scenes or adjust the colour temperature from warm to cool light.

### CONNECT.CONTROL™ REMOTE FUNCTIONS

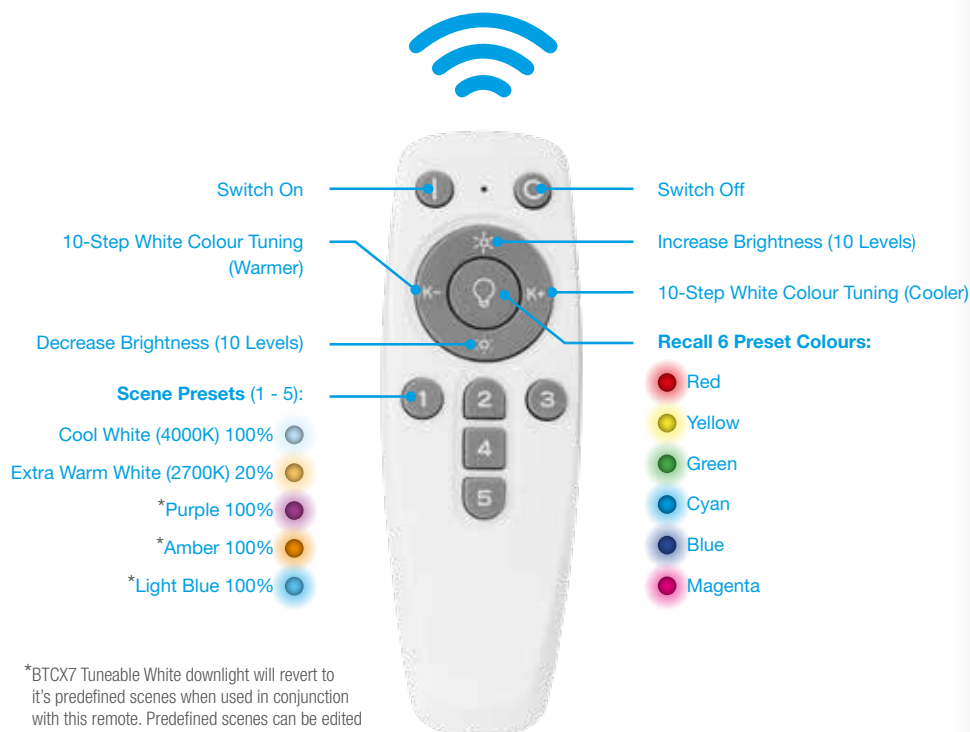

#### Upgrade Process

There are four levels of control available in the Bluetooth system

##### Level 1 - Starter Kit

Simply smarten one room with a single kit and remote

##### Level 2 - Adding More Devices

Add additional Bluetooth lamps to your existing kit  
See Page 13-14 for additional devices


##### Level 3 - Group Lights and Remotes Together

Purchase multiple kits and assign remotes to a specific group of lights

##### Level 4 - App Control

Download the Aurora BLE App and use the generic login details to control your devices, edit scenes and create schedules.

**connect.control™** GLS & GU10 kits, all offering RGB + Tuneable White options

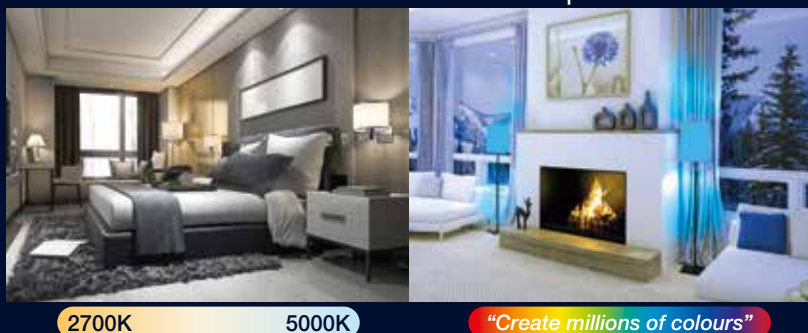

2x AAA batteries supplied

AU-A18TRC1

(L) 120mm Length  
(W) 40mm Width  
(H) 20mm Height

Compatible with the Aurora BLE App

3 Year Warranty

L70 25,000hrs

On/Off, Dimmable, RGB  
and Tuneable White control




works with

.control

Bluetooth Remote  
See pg.8




Bluetooth  
Battery Dimmer  
See pg.17



**GU10**

(OD) 50mm Overall (Ø)  
(L) 56mm Length



**GLS**

(OD) 60mm Overall (Ø)  
(L) 117mm Length

**AOne™.light**  
connect.control™ RGB Tuneable  
White GU10 & GLS Lamp kits



RGB + Tuneable White colour temperature between 2700-5000K

Kits supplied with RGB + Tuneable White lamps and remote



### GU10 LAMP KIT

4x 5W RGB + Tuneable White GU10 Lamps & Bluetooth Remote



### E27 GLS LAMP KIT

2x 8W RGB + Tuneable White E27 GLS Lamps & Bluetooth Remote



### B22 GLS LAMP KIT

2x 8W RGB + Tuneable White B22 GLS Lamps & Bluetooth Remote



2700K

5000K

"Create millions of colours"



Cat. No.	Base	Watts	Colour	Lumens	lm/W	Beam
<b>GU10 lamp kit</b>						
<b>AU-A1BTGUCWK</b>	GU10	5W	2700-5000K	300-330lm	60	40°
<b>GLS lamp kit</b>						
<b>AU-A1BTGECWK</b>	E27	8W	2700-5000K	800-850lm	100	160°
<b>AU-A1BTGBCWK</b>	B22	8W	2700-5000K	800-850lm	100	160°
<b>Accessories</b>						
<b>AU-A1BTRC1*</b>	AOne™ connect.control™ Bluetooth Remote					
<b>AU-A1BTR2GW*</b>	AOne™ connect.control™ Two Gang Wireless Battery Dimmer					

\*Works with AOne™ connect.control™ devices







## Bluetooth RGB + Tuneable White LED Strip Kits

A great way to add vibrancy and feature lighting to any residential or hospitality project.

Install your LED strip, turn the remote on and simply begin to control the colour within your application. Recall RGB colours and adjust colour temperatures to offer warm or cool light.


### Application Overview



**CREATE ADDED AMBIANCE**  
Use the connect.control™ strip kit to add vibrancy to your application.

The ideal and versatile addition that be used to further enhance multiple environments.

Lighting



1

**Install** LED strip to any clean surface within your space



2

**Connects** automatically to the connect.control™ controllers



3

**Control** via App or connect.control™ controllers



Compatible with EN-CH105, EN-CH106KIT & EN-CH109KIT aluminium channel  
**(Diffuser not included with CH105)**

### ADD ADDITIONAL LED STRIP TO YOUR STRIP KIT USING THE LED STRIP ACCESSORIES:

#### AU-A1BTCWSK1 -

Add up to an additional 5m

#### AU-A1BTCWSK4 -

Add up to an additional 3m



Compatible with the Aurora BLE App



2x AAA batteries supplied

#### AU-A1BTRC1

(L) 120mm Length  
(W) 40mm Width  
(H) 20mm Height

3 Year Warranty

L70 25,000hrs

On/Off, Dimmable, RGB  
and Tuneable White control



works with

.control


Bluetooth Remote  
See pg.8




Bluetooth  
Battery Dimmer  
See pg.17



**2m & 3m Extention Kit Includes,**  
Bluetooth module, 2/3m LED  
strip, fixing clips.



**AU-A1BTCWSK4**  
(L) 3000mm Length



**AU-A1BTCWSK1**  
(L) 5000mm Length

## AOne<sup>TM</sup>.light

connect.control<sup>TM</sup> RGB + Tuneable  
White LED Strip Kits



3m or 5m RGB + tuneable white LED strip, control colour temperature  
between 2700-5000K

5-100% dimming range

120° beam angle

Cut points every 167mm

Ability to be controlled individually or within a space

Can be used in lighting scenes, schedules and music mode via the app

Works directly with the Aurora BLE App and the connect.control<sup>TM</sup> remote  
control AU-A1BTRC1 or battery dimmer AU-A1BTR2GW

Two installation options available for plug & play or for hardwiring

Add AU-A1BTCWS2M + AU-A1BTCWS3M for an additional 5m of strip to  
5m kit (10m total)

Add AU-A1BTCWS3M for an additional 3m of strip to the 3m kit (6m total)



### 3M OR 5M LED STRIP KITS

6W/m RGB + Tuneable White Indoor LED Strip & Bluetooth Remote



"Create millions of colours"

**2700K**

400lm/m

**5000K**

405lm/m



Cat. No.	Watts/m	No. of LED/m	Colour	lm/m
<b>3m LED strip kit</b>				
<b>AU-A1BTCWSK4</b>	6	90	2700-5000K	400-405lm/m
<b>5m LED strip kit</b>				
<b>AU-A1BTCWSK1</b>	6	90	2700-5000K	400-405lm/m
<b>Accessories</b>				
<b>AU-A1BTSP3W</b>	AOne <sup>TM</sup> connect.control <sup>TM</sup> Splitter Cable for Strip Addition Packs			
<b>AU-A1BTCWS2M</b>	AOne <sup>TM</sup> connect.control <sup>TM</sup> 2m LED Strip Addition Pack			
<b>AU-A1BTCWS3M</b>	AOne <sup>TM</sup> connect.control <sup>TM</sup> 3m LED Strip Addition Pack			





## Bluetooth RGB + Tuneable White Lamps

A great way to smarten any application and a simple way to add to an existing smart kit. Additional lamps will immediately work with other lamps straight out of the box.

### Application Overview

## THE ULTIMATE SMART LIGHTING UPGRADE


### SET YOUR SCENES

Group your home lighting into rooms using the remote to enable on or off control, dimming and colour changing functionality.

Preset lighting scenes ready for you to enable straight out of the box.

### SmartTip

Extend control outside with GU10s in wall, ground and spike lighting



### 3 Step Simple Install



1

**Replace** existing lamps with AOne™ Bluetooth LED lamps



2

**Connects** automatically to the connect.control™ controllers



3

**Control** via App or connect.control™ controllers

### Retrofit Solution

For Indoor & Outdoor Applications




2700K

5000K



"Create millions of colours"

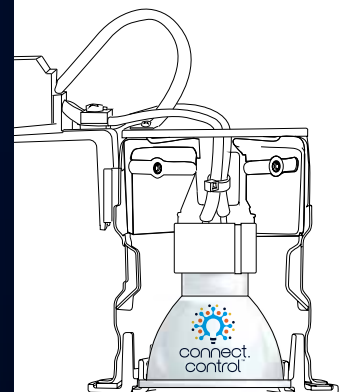

AOne™ Smart Lamp fits ALL Aurora standard cans



3 Year Warranty

L70 25,000hrs

On/Off, Dimmable, RGB  
and Tuneable White control




works with

.control

Bluetooth Remote  
See pg.8



Bluetooth  
Battery Dimmer  
See pg.17



**AU-A1BTGUCW**  
(OD) 50mm Overall (Ø)  
(L) 56mm Length

## AOne™.light

connect.control™ RGB + Tuneable  
White GU10



5-100% dimming range

RGB + tuneable white colour temperature between 2700-5000K

Suitable for use in most GU10 downlights

40° beam angle

Ability to be controlled individually or within a space

Can be used in lighting scenes, schedules and music mode via the app

Works directly with the Aurora BLE App and the connect.control™ remote  
control AU-A1BTRC1 or battery dimmer AU-A1BTR2GW



AOne™ RGB + Tuneable White GU10 Lamp  
See Pg. 8 & 17 for information on the connect.control™ Bluetooth controllers



Cat. No.	Base	Watts	Colour	Lumens	lm/W	Beam
<b>RGB + Tuneable White GU10</b>						
<b>AU-A1BTGUCW</b>	GU10	5W	2700-5000K	300-330lm	60	40°
<b>Accessories</b>						
<b>AU-A1BTRC1*</b>	AOne™ connect.control™ Bluetooth Remote					
<b>AU-A1BTR2GW*</b>	AOne™ connect.control™ Two Gang Wireless Battery Dimmer					

\*Works with AOne™ connect.control™ devices



# AOne<sup>TM</sup>.light

connect.control<sup>TM</sup> RGB + Tuneable  
White GLS



RGB + tuneable white colour temperature between 2700-5000K  
5-100% dimming range  
Delivering up to 106lm/W  
Available in E27 or B22 base type  
160° beam angle  
Ability to be controlled individually or within a space  
Can be used in lighting scenes, schedules and music mode via the app  
Works directly with the Aurora BLE App, the connect.control<sup>TM</sup> remote control AU-A1BTRC1 and battery dimmer AU-A1BTR2GW

3 Year Warranty

L70 25,000hrs

On/Off, Dimmable, RGB  
and Tuneable White control




AOne<sup>TM</sup> RGB + Tuneable White GLS Lamp  
See Pg. 8 & 17 for information on the connect.control<sup>TM</sup> Bluetooth controllers



works with

.control



Bluetooth Remote  
See pg.8




Bluetooth  
Battery Dimmer  
See pg.17



Cat. No.	Base	Watts	Colour	Lumens	lm/W	Beam
<b>RGB + Tuneable White GLS</b>						
AU-A1BTGSCWE	E27	8W	2700-5000K	800-850lm	106	160°
AU-A1BTGSCWB	B22	8W	2700-5000K	800-850lm	106	160°
<b>Accessories</b>						
AU-A1BTRC1*	AOne <sup>TM</sup> connect.control <sup>TM</sup> Bluetooth Remote					
AU-A1BTR2GW*	AOne <sup>TM</sup> connect.control <sup>TM</sup> Two Gang Wireless Battery Dimmer					

\*Works with AOne<sup>TM</sup> connect.control<sup>TM</sup> devices



AU-A1BTGSCW  
(OD) 60mm Overall (Ø)  
(L) 117mm Length



3 Year Warranty

L70 25,000hrs

On/Off, Dimmable, RGB  
and Tuneable White control




works with

.control

Bluetooth Remote  
See pg.8



Bluetooth  
Battery Dimmer  
See pg.17



**AU-A1BTE14CW**  
(OD) 37mm Overall (Ø)  
(L) 107mm Length

## AOne<sup>TM</sup>.light

connect.control<sup>TM</sup> RGB + Tuneable  
White Candle



RGB + tuneable white colour temperature between 2700-5000K

5-100% dimming range

Delivering up to 94lm/W

Available in E14 base type

180° beam angle

Ability to be controlled individually or within a space

Can be used in lighting scenes, schedules and music mode via the app

Works directly with the Aurora BLE App, the connect.control<sup>TM</sup> remote  
control AU-A1BTRC1 and battery dimmer AU-A1BTR2GW



AOne<sup>TM</sup> RGB + Tuneable White Candle Lamp  
See Pg. 8 & 17 for information on the connect.control<sup>TM</sup> Bluetooth controllers



"Create millions of colours"

**2700K**

450lm

**5000K**

470lm



Cat. No.	Base	Watts	Colour	Lumens	lm/W	Beam
----------	------	-------	--------	--------	------	------

### RGB + Tuneable White Candle

**AU-A1BTE14CW**

E14

5W

2700-5000K

450-470lm

94

180°

### Accessories

**AU-A1BTRC1\***

AOne<sup>TM</sup> connect.control<sup>TM</sup> Bluetooth Remote

**AU-A1BTR2GW\***

AOne<sup>TM</sup> connect.control<sup>TM</sup> Two Gang Wireless Battery Dimmer

\*Works with AOne<sup>TM</sup> connect.control<sup>TM</sup> devices




A<sup>+</sup>

## Bluetooth Battery Rotary Dimmer

Using Bluetooth technology, Aurora's connect.control™ product range offers you instant smart lighting control, straight out of the box. Connect your light fittings, turn the dimmer on and simply begin to control your lights. You can recall **6 RGB colours**, trigger **5 pre programmed scenes** or adjust the **colour temperature from warm to cool**.

### Dimming, RGB & Tuneable White Colour Control

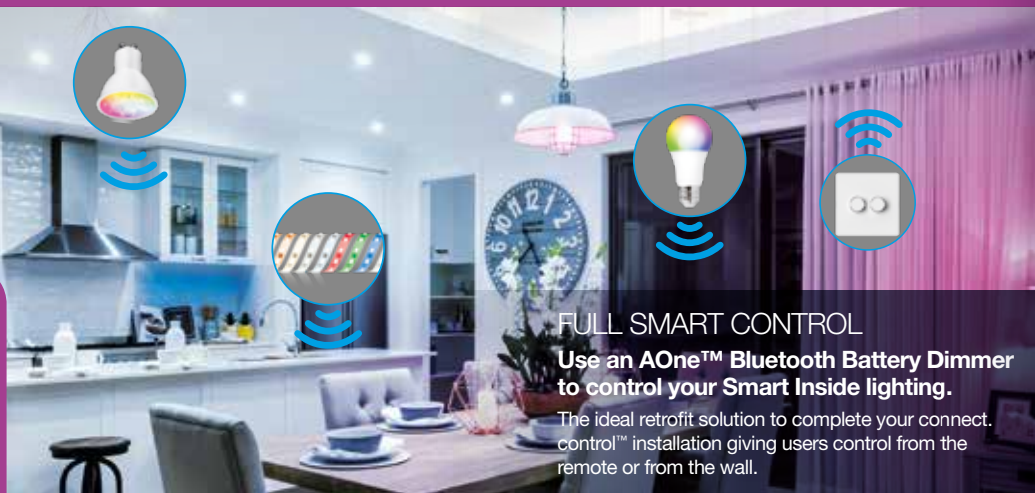

#### FULL SMART CONTROL

Use an AOne™ Bluetooth Battery Dimmer to control your Smart Inside lighting.

The ideal retrofit solution to complete your connect.control™ installation giving users control from the remote or from the wall.



15mm surface mount pattress **(included)** for easy installation with or without back box

Control

#### Left Dimmer Primary Function


**Increase/Decrease Brightness (10 Levels)**

Push ON/OFF

#### Left Dimmer Secondary Function

3 second press to activate

Red ● Cyan ●  
Yellow ● Blue ●  
Green ● Magenta ●

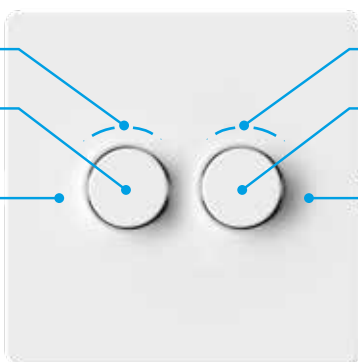

#### Right Dimmer Primary Function

**10-Step Colour tuning (Warmer/Cooler)**

Push ON/OFF

#### Right Dimmer Secondary Function

3 second press to activate

Scene Presets (1 - 5):

● 100% (4000K) Cool White  
● 20% (2700K) Warm White  
● 100% Purple\*  
● 100% Amber\*  
● 100% Light Blue\*

\*BTCX7 Tuneable White downlight will revert to it's predefined scenes when used in conjunction with this dimmer. Predefined scenes can be edited on the Aurora BLE App.

#### connect.control™ options

Control connect.control lighting from the comfort of your sofa with the remote or from the wall with the wall mounted Bluetooth battery dimmer.



Bluetooth Battery Dimmer



Bluetooth Remote

Supplied with batteries



2x AAA



2x AA



3 Year Warranty

On/Off, Dimmable, RGB and  
Tuneable White control

White finish




works with

.control

CX Downlight  
See pg.5



RGBCX Downlight  
See pg.7



RGBCX Strip  
See pg.11





RGBCX GU10  
See pg.13



RGBCX GLS  
See pg.14



RGBCX Candle  
See pg.15



**AU-A1BTR2GW**

(L) 92mm Length

(W) 92mm Width

(H) 6mm Height

(RD) 13mm Recess Depth

**AOne™.control**  
connect.control™ Rotary Dimmer



Control your connect.control™ lights by replacing your existing light switches

Battery-powered so no wiring required

connect.control™ ready, has same function as the connect.control™ remote control

Battery dimmer controls 1 group of lights

Left side of the rotary dimmer offers the dimming function of the group

Right side of the rotary dimmer allows you to adjust colour temperature of the group

Secondary function allows you to scroll through 6 RGB colours on left dimmer and  
the 5 preset scenes on the right dimmer

Surface mount pattress included

2x AA batteries included



AOne™ Bluetooth Battery Rotary 2 Gang Dimmer

Control



Cat. No.

Description

Finish

**Smart Rotary 2 Gang Dimmer**

**AU-A1BTR2GW\***

AOne™ connect.control™ Two Gang Wireless  
Battery Dimmer

White

\*Works with AOne™ connect.control™ devices



## Feature Products

**X7**

**NEW**



See pg.22

**CX7**

**NEW**



See pg.23

**A6<sup>PRO</sup>**



Warranty Upgraded See pg.25

**mPRO<sup>™</sup>**



Warranty Upgraded See pg.29





# DOWNLIGHTS & LAMPS

# X Series

make smart with



Aone  
control

## DESIGNED WITH THE INSTALLER IN MIND

The X Series is the latest addition to the fire rated portfolio. With the installer in mind, the X7™ and CX7™ are the first of our range to be supplied complete with a polycarbonate IP65 bezel.

**Up to 89lm/W**



Fire Rated Downlights



# Meet the Family



**X7™**



**CX7™**

Featuring a new hinged cap for tool free installation

New push terminals for fast wiring of either solid or stranded cable

Screwless strain relief - simply close the cap to secure the cables



## Maximum output. Minimum effort.

Both the X7™ and CX7™ products save you installation time with their hinged insulation caps, screwless strain relief and push loop in/loop out terminals.



## Supplied with IP65 Polycarbonate white bezel.

Ideal for use in bathrooms or exterior soffits. Small in height making it ideal for use for shallow ceiling voids.



I-Joists



Metal Web Joists



Solid Timber Joists

## Suitable for use with I-joists, metal web and solid timber joists

For further information please visit  
<https://auroralighting.com/gb/ijoist>



**Watch Video**

Colour Switchable  
between 3000K,  
4000K and 5700K



## LED Fixed Fire Rated Downlights

Integrated driver on board with loop in/loop out terminal block for quick and easy installation

Supplied with a IP65 polycarbonate white bezel (IP65 polycarbonate polished chrome & satin nickel bezel finishes sold separately)

Insulation coverable

Patented fire rated downlight without intumescent

Tested in 30, 60 and 90 minute solid timber joist, plus 30 minute i-joist and metal web joist fire rated ceilings

Edge-to-edge multifaceted polycarbonate lens for low glare and halogen like appearance

60° beam angle



Supplied with IP65 Polycarbonate White Bezel



AU-BZX7SN



AU-BZX7PC



Watch Video



30, 60, 90 minutes (Solid Timber Joists)  
30 minutes (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>X7™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)</b>						
AU-X7/30	7W	3000K	580lm	83	60°	70mm
AU-X7/40	7W	4000K	620lm	89	60°	70mm

### Bezel Options

AU-BZX7\* X7™ Fixed IP65 Polycarbonate Downlight Bezel

\*Add suffix PC or SN for Polished Chrome or Satin Nickel finishes.

3 hour Emergency pack AU-FRLM10EMB available, see pg.70

Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.

Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information



make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

3 Year Warranty

L70 35,000hrs

Triac dimmable as standard

Emergency option

IP65 Polycarbonate Polished  
Chrome and Satin Nickel  
bezel options

make smart with




For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control





Triac Inline Dimmer



Smart Rotary Dimmer

AU-X7

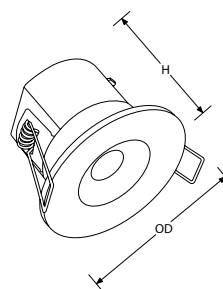

AU-X7

(H) 58mm Height

(OD) 88mm Overall (Ø)

3 Year Warranty

L70 35,000hrs

Triac dimmable as standard

Emergency option

IP65 Polycarbonate Polished  
Chrome and Satin Nickel  
bezel options

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)


works with

.control



Triac Inline Dimmer



Smart Rotary Dimmer



AU-CX7

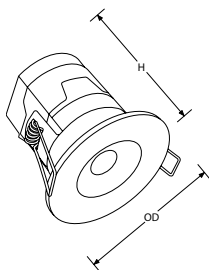

AU-CX7

(H) 80mm Height  
(OD) 88mm Overall (Ø)



## Colour Switchable LED Fixed Fire Rated Downlight

Colour temperature can be switched between 3000K, 4000K and 5700K

Lumen output ranges from 580lm at 3000K, 620lm at 4000K and 620lm at 5700K

Integrated driver on board with loop in/loop out terminal block for quick and easy installation

Supplied with a IP65 polycarbonate white bezel (IP65 polycarbonate polished chrome & satin nickel bezel finishes sold separately)

Insulation coverable

Patented fire rated downlight without intumescent

Select colour temperature prior to installation

Tested in 30, 60 and 90 minute solid timber joist, plus 30 minute i-joist and metal web joist fire rated ceilings

Edge-to-edge multifaceted polycarbonate lens for low glare and halogen like appearance  
60° beam angle



Supplied with IP65  
Polycarbonate White Bezel



AU-BZX7SN



AU-BZX7PC



Switch between  
WW-3000K (Warm White)  
CW-4000K (Cool White)  
DL-5700K (Daylight)



30, 60, 90 minutes (Solid Timber Joists)  
30 minutes (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
----------	-------	--------	--------	------	------	------------

CX7™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)

AU-CX7	7W	3000-5700K	580lm	83	60°	70mm
--------	----	------------	-------	----	-----	------

### Bezel Options

AU-BZX7\* X7™ Fixed IP65 Polycarbonate Downlight Bezel

\*Add suffix PC or SN for Polished Chrome or Satin Nickel finishes.

3 hour Emergency pack AU-FRLM10EMB available, see pg.70

Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.  
Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information



With Bezel

# A6<sup>TM</sup>PRO

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

## Up to 117 lm/W

Record breaking installation times when using the RapidWire connection system



AIR leakage  
(excluding adjustable)



Watch Video



## NOW COMES WITH 7 YEAR WARRANTY

## TOOL FREE INSTALLATION

wire in seconds

### Insulation Coverable

- No accessory required
- No insulation cut-out required



### Improved latching terminals for faster installation.

Suitable for use with solid or stranded cable.



First fix & testing - earth continuity, earth fault, loop impedance and insulation resistance testing



Second fix - luminaire installation



A6<sup>TM</sup>PRO  
Accessories

White

Matt White

Polished  
Chrome

Satin  
Nickel

Adaptor  
Plate





7 Year Warranty

L70 70,000hrs

Triac dimmable as standard

Emergency option

White, Matt White, Polished

Chrome & Satin Nickel IP65

Aluminium bezel options

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)

works with

.control



Triac Inline Dimmer



Smart Rotary Dimmer



AU-A6PRO

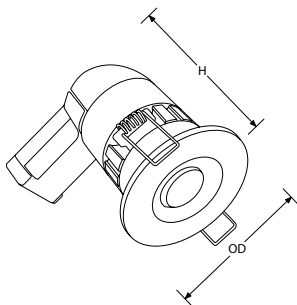

AU-A6PRO

(H) 100mm Height  
(OD) 85mm Overall (Ø)

AU-A62PRO

(H) 105mm Height  
(OD) 95mm Overall (Ø)

# A6<sup>TM</sup>PRO

## LED Fixed/Adjustable Fire Rated Downlights

Slim, interchangeable IP65 bezels (fixed version)

providing a sleek finish

IP20 bezel included for adjustable version

Delivering up to 117lm/W

Insulation coverable

Patented fire rated downlight with intumescent

Tested in 30, 60 and 90 minute solid timber joist, plus

30 minute i-joist and metal web joist fire rated ceilings

60° beam angle



Fixed IP65



Adjustable IP20



AIR leakage  
(excluding  
adjustable)

**30, 60, 90 minutes** (Solid Timber Joists)  
**30 minutes** (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>A6PRO<sup>TM</sup> Triac Dimmable Fixed (IP65 when used with IP65 Bezel)</b>						
<a href="#">AU-A6PRO/30</a>	6W	3000K	600lm	100	60°	70mm
<a href="#">AU-A6PRO/40</a>	6W	4000K	620lm	103	60°	70mm
<b>A6PRO<sup>TM</sup> Triac Dimmable Adjustable</b>						
<a href="#">AU-A62PRO*/30</a>	6W	3000K	680lm	113	60°	80mm
<a href="#">AU-A62PRO*/40</a>	6W	4000K	700lm	117	60°	80mm

### Bezel Options

[AU-BZA6\\*](#) A6<sup>TM</sup> PRO/A6<sup>TM</sup> Fixed IP65 Aluminium Downlight Bezel

[AU-AP86\\*](#) Fixed Fire Rated Aluminium Adaptor Plate 85-145mm

\*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

**3 hour Emergency pack AU-FRLM10EMB available, see pg.70**

**Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.**

Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information



With Bezel



# A6™

## LED Fixed/Adjustable Fire Rated Downlights

Hinged cap and latching terminals for faster installation  
Slim, interchangeable IP65 bezel (fixed version)  
IP20 bezel included for adjustable version  
Delivering up to 107lm/W  
Insulation coverable  
Patented fire rated downlight with intumescent  
Tested in 30, 60 and 90 minute solid timber joist, plus  
30 minute i-joist and metal web joist fire rated ceilings  
60° beam angle

## NOW COMES WITH 5 YEAR WARRANTY



Fixed IP65



Adjustable IP20



AIR leakage  
(excluding  
adjustable)

**30, 60, 90 minutes** (Solid Timber Joists)  
**30 minutes** (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
----------	-------	--------	--------	------	------	------------

### A6™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)

AU-A6/30	6W	3000K	600lm	100	60°	70mm
AU-A6/40	6W	4000K	620lm	103	60°	70mm

### A6™ Triac Dimmable Adjustable

AU-A62*/30	6W	3000K	610lm	102	60°	85mm
AU-A62*/40	6W	4000K	640lm	107	60°	85mm

### Bezel Options

AU-BZA6*	A6™ PRO/A6™ Fixed IP65 Aluminium Downlight Bezel
AU-AP86*	Fixed Fire Rated Aluminium Adaptor Plate 85-145mm

\*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

**3 hour Emergency pack AU-FRLM10EMB available, see pg.70**

**Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.**  
**Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information**



With Bezel

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

### 5 Year Warranty

L70 50,000hrs

Triac dimmable as standard

Emergency option

White, Matt White, Polished  
Chrome & Satin Nickel IP65  
Aluminium bezel options

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with



.control



Triac Inline Dimmer

Smart Rotary Dimmer

AU-A6

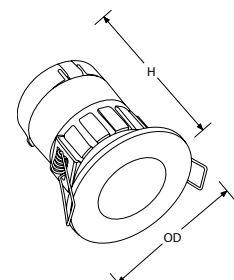

AU-A6

(H) 87mm Height  
(OD) 85mm Overall (Ø)

AU-A62

(H) 95mm Height  
(OD) 98mm Overall (Ø)

5 Year Warranty

L70 50,000hrs

Triac dimmable as standard

Emergency option

White, Matt White, Polished

Chrome & Satin Nickel IP65

Aluminium bezel options



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)


works with

.control



Triac Inline Dimmer



Smart Rotary Dimmer



AU-A4

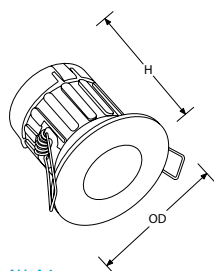

AU-A4

(H) 69mm Height  
(OD) 78mm Overall (Ø)

AU-A42

(H) 90mm Height  
(OD) 88mm Overall (Ø)

# A4™

## LED Fixed/Adjustable Fire Rated Downlights

Hinged cap and latching terminals for faster installation

Slim, interchangeable IP65 bezel (fixed version)

IP20 bezel included for adjustable version

Delivering up to 105lm/W

Insulation coverable

Patented fire rated downlight with intumescent

Tested in 30, 60 and 90 minute solid timber joist, plus

30 minute i-joist and metal web joist fire rated ceilings

60° beam angle

### NOW COMES WITH 5 YEAR WARRANTY



Fixed IP65

Adjustable IP20



AIR leakage  
(excluding  
adjustable)

**30, 60, 90 minutes** (Solid Timber Joists)  
**30 minutes** (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>A4™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)</b>						
<a href="#">AU-A4/30</a>	4W	3000K	400lm	100	60°	65mm
<a href="#">AU-A4/40</a>	4W	4000K	410lm	103	60°	65mm
<b>A4™ Triac Dimmable Adjustable</b>						
<a href="#">AU-A42*/30</a>	4W	3000K	410lm	103	60°	75mm
<a href="#">AU-A42*/40</a>	4W	4000K	420lm	105	60°	75mm

**Bezel Options**

[AU-BZA4\\*](#) A4™ Fixed IP65 Aluminium Downlight Bezel

\*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

**3 hour Emergency pack AU-FRLM10EMB available, see pg.70**

**Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.**

**Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information**



With Bezel

Fire Rated Downlights

## Up to 107 lm/W

Unique convertible design  
for use in shallow ceiling voids



AIR leakage  
(excluding  
adjustable)

## NOW COMES WITH 7 YEAR WARRANTY



Watch Video



Floating earth  
termination  
for earth continuity

Push fit  
Loop in/Loop  
out terminals




Convertible design for  
shallow ceiling voids



Comes with FastRFix™  
connector for fast installation



**mPRO™**  
Accessories

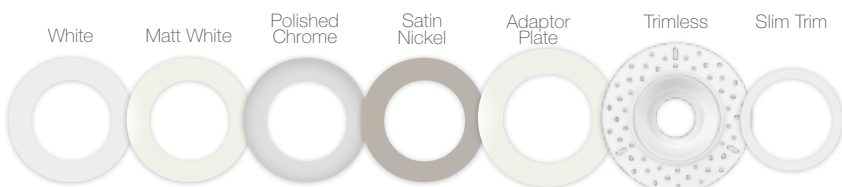



7 Year Warranty

L70 70,000hrs

Triac dimmable as standard

Emergency option

White, Matt White,  
Polished Chrome & Satin  
Nickel IP65 Aluminium  
bezel options

White slimtrim bezel option

Black or White trimless  
bezel options

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)


works with

.control


Triac Inline Dimmer





Smart Rotary Dimmer



AU-MPRO1A



AU-MPRO5A

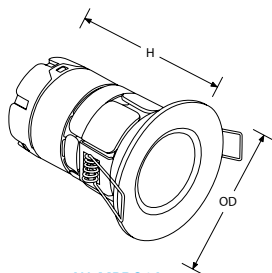

AU-MPRO1A

(H) 100mm Height  
(OD) 88mm Overall (Ø)

AU-MPRO2A

(H) 100mm Height  
(OD) 98mm Overall (Ø)

AU-MPRO5A

(H) 120mm Height  
(OD) 88mm Overall (Ø)

**mPRO™**

LED Fixed/Adjustable/Baffle  
Fire Rated Downlights

LEDchroic™ lens provides halogen appearance with LED efficiency,  
anti-glare and precise beam control

Unique convertible design to fit ceiling voids as shallow as 53mm

Insulation coverable

Patented fire rated downlight with intumescent

Interchangeable IP65 bezel for fixed version

IP65 rated for adjustable and baffle option

FastRFix™ rapid install system connector included

Tested in 30, 60 and 90 minute solid timber joist, plus 30 minute  
i-joist and open web joist fire rated ceilings

AU-MPRO1A & AU-MPRO2A - 60° beam angle

AU-MPRO5A - 40° beam angle



Fixed IP65



Adjustable IP65



Fixed Baffle IP65



AIR leakage  
(excluding  
adjustable)

**30, 60, 90 minutes** (Solid Timber Joists)  
**30 minutes** (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
----------	-------	--------	--------	------	------	------------

**mPRO™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)**

AU-MPRO1A/27	6W	2700K	560lm	93	60°	70mm
AU-MPRO1A/30	6W	3000K	600lm	100	60°	70mm
AU-MPRO1A/40	6W	4000K	640lm	107	60°	70mm

**mPRO™ Triac Dimmable IP65 Adjustable**

AU-MPRO2A*/30	6W	3000K	610lm	102	60°	85mm
AU-MPRO2A*/40	6W	4000K	640lm	107	60°	85mm

**mPRO™ Triac Dimmable IP65 Baffle (suitable for 30 & 60 minute ceilings)**

AU-MPRO5A/30	6W	3000K	480lm	80	40°	72mm
AU-MPRO5A/40	6W	4000K	500lm	83	40°	72mm

**Bezel Options**

AU-BZ600†	mPro™ Fixed IP65 Aluminium Downlight Bezel
AU-AP600*	mPro™ Fixed Fire Rated Aluminium Adaptor Plate
AU-BZ605W	mPro™ Fixed Slimtrim Aluminium Baffle Bezel
AU-MPROTL**	mPro™ Fixed Trimless Aluminium Bezel

†Add suffix **W**, **MW**, **PC**, **SN** or **BLK** for White, Matt White, Polished Chrome, Satin Nickel or Black finishes.

\*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

\*\*Add suffix **W** or **BLK** for White or Black finishes.

**3 hour Emergency pack AU-FRLM10EMB available, see pg.70**

**Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.**

**Please visit [auroralighting.com/gb/joist](http://auroralighting.com/gb/joist) for further information**



With Bezel

Fire Rated Downlights

# Primo™


## LED Module Architectural Downlights

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

- Ultra slim 1.5mm bezel
- Citizen CLU028 LED chip for superior light output and control
- Adjustable version has 20° horizontal adjustment
- Adjustable version can still be adjusted and rotated once installed
- SDCM < 1 for complete colour consistency
- CRI98 for true colour representation
- Trimless plaster-in mount available for seamless installation
- AU-ADST1BIP - Fixed IP65 rated
- AU-ADST2BIP - Adjustable IP65 rated
- FastRFix rapid install system connector included
- Triac dimmable constant current LED driver included
- Fire rated can accessory now available



Round Bezel



Oval Bezel




Pinhole Bezel



Trimless Bezel Accessory  
(sold separately)



Fire Can  
(sold separately)



IP65 Rated Bezel

Cat. No.	Type	Watts	Colour	Lumens	Beam	Horz. Adj.	Cutout [Ø]
----------	------	-------	--------	--------	------	------------	------------

### Triac Dimmable

<a href="#">AU-ADST1B<sup>†</sup>*/27</a>	Fixed	11W	2700K	340lm	18°	-	75mm
<a href="#">AU-ADST2B<sup>†</sup>*/27</a>	Adjustable	11W	2700K	350lm	18°	20°	75mm

### Accessories

<a href="#">AU-ADTLBZ</a>	Trimless bezel accessory
<a href="#">AU-ADFRC</a>	Fire rated can for fixed version only

<sup>†</sup>Add suffix **RB**, **OV**, **PN** or **IP** for Round, Oval, Pinhole or IP Rated Bezels.

\*Add suffix **DA** or **V** for Dali or 1-10V dimmable options.

Lumen values stated in table based on round bezel option

**3 hour Emergency pack AU-DLEMB2B available, see pg.70**

**Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.**

Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information



30

AURORA®

### 5 Year Warranty

L70 50,000hrs

Triac dimmable as standard,  
1-10V & DALI dimmable options

Emergency option

Matt White finish

make smart with



For Information about AOne ZIGBEE


Visit [auroralighting.com](http://auroralighting.com)

works with

.control



Triac Inline Dimmer





Smart Rotary Dimmer



1-10V Inline Dimmer  
for 1-10V Option

AU-ADST1BRB



**AU-ADST1B**

(H) 115mm Height  
(OD) 90mm Overall (Ø)

**AU-ADST2B**

(H) 115mm Height  
(OD) 90mm Overall (Ø)

5 Year Warranty

Matt White finish



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with


.light

Smart  
Tuneable GU10




.control



Dimmable  
Standard GU10  
PLUS  
Triac Inline Dimmer



OR  
Smart Rotary Dimmer



Non-Dimmable  
Standard GU10  
PLUS  
On/Off Relay

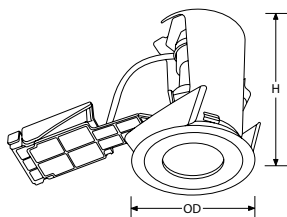

**AU-ADGUST1B**  
(H) 115mm Height  
(OD) 90mm Overall (Ø)

**AU-ADGUST2B**  
(H) 115mm Height  
(OD) 90mm Overall (Ø)

# Primo™

## GU10 Architectural Downlights

Ultra slim 1.5mm bezel

Flexible bracket and push fit terminals for ease of installation

Adjustable version has 20° horizontal adjustment

Adjustable version can still be adjusted and rotated once installed

Trimless plaster-in mount available for seamless installation

AU-ADGUST1BIP - Fixed IP65 rated

AU-ADGUST2BIP - Adjustable IP65 rated

For use with GU10 lamps - lamp not included

Fire rated can accessory now available

Smart  
Lamp options  
See pg.13



**NOW COMES WITH  
5 YEAR WARRANTY**



Round Bezel




Oval Bezel



Pinhole Bezel



IP65 Rated Bezel



Trimless Bezel Accessory  
(sold separately)



Fire Can  
(sold separately)

Downlights

Cat. No.	Type	Horz. Adj.	Cutout [Ø]
<b>AU-ADGUST1B*</b>	Fixed	-	75mm
<b>AU-ADGUST2B*</b>	Adjustable	20°	75mm

### Accessories

**AU-ADGUTLBZ** Trimless bezel accessory



**AU-ADGFRFC** Fire rated can for fixed version only

\*Add suffix **RB**, **OV**, **PN** or **IP** for Round, Oval, Pinhole or IP Rated Bezels

Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.  
Please visit [auroralighting.com/gb/ijoist](http://auroralighting.com/gb/ijoist) for further information




# CurveE<sup>TM</sup>PRO

CRI90 Baffled Aluminium LED Downlights

make smart with  
AOne control  
For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

Sleek baffled design with the light source recessed back to reduce glare  
CRI90 for superior colour representation  
Delivering up to 80lm/W  
EN-DLB152D - IP44 rated  
EN-DLB152AD - IP20 rated  
EN-DLB152AD - Horizontal adjustment 20°  
Supplied with remote triac dimmable constant current LED driver  
45° beam angle

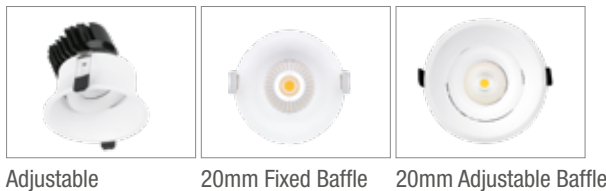

**NEW**

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Baffle Recess	Cutout [Ø]
<b>Triac Dimmable</b>							
EN-DLB152D*/30	15W	3000K	1100lm	73	45°	20mm	90mm
EN-DLB152D*/40	15W	4000K	1200lm	80	45°	20mm	90mm
EN-DLB152AD*/30	15W	3000K	1100lm	73	45°	20mm	105mm
EN-DLB152AD*/40	15W	4000K	1200lm	80	45°	20mm	105mm

\*Add suffix **DA** for DALI or **V** for 1-10V dimmable option



5 Year Warranty

L80 50,000hrs


Triac dimmable as standard,  
1-10V & DALI dimmable options

Matt White finish


make smart with  
AOne control  
For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with



.control

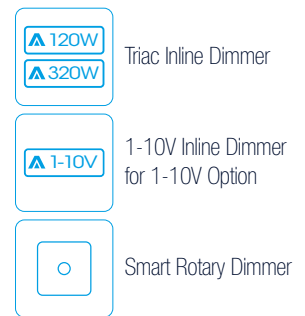

EN-DLB152D



EN-DLB152AD



**EN-DLB152D**  
(H) 90mm Height  
(OD) 98mm Overall (Ø)  
**EN-DLB152AD**  
(H) 102mm Height  
(OD) 110mm Overall (Ø)





## Up to 107 lm/W

Versatile downlight with three colour selection



Switch between WW-3000K (Warm White), NW-4000K (Neutral White) and CW-5700K (Cool White)

Before installation, make a selection for your desired colour temperature.

ReflectCS™ is the perfect solution for a range of applications.

Warm Relaxed Lighting  
3000K



Attentive Task Lighting  
4000K



Ambient Task Lighting  
5700K



5 Year Warranty

L70 50,000hrs

Triac dimmable as standard,  
1-10V & DALI dimmable options

Matt White finish



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

Triac Inline Dimmer




1-10V Inline Dimmer  
for 1-10V Option




Smart Rotary Dimmer





EN-DDL186CCT/30



EN-DDL186CCT/40



EN-DDL186CCT/57

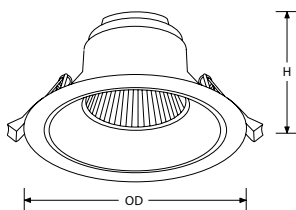

EN-DDL134CCT

(H) 73mm Height  
(OD) 145mm Overall (Ø)

EN-DDL186CCT

(H) 90mm Height  
(OD) 190mm Overall (Ø)

EN-DDL188CCT

(H) 100mm Height  
(OD) 235mm Overall (Ø)

EN-DDL258CCT

(H) 100mm Height  
(OD) 235mm Overall (Ø)

EN-DDL358CCT

(H) 100mm Height  
(OD) 235mm Overall (Ø)

# ReflectCS™

High Powered Colour Switchable SMD  
Aluminium Downlight

Colour switchable between 3000K, 4000K & 5700K

Downlight for various applications

High powered SMD with a multifaceted aluminium reflector

Delivering up to 107lm/W

IP54 rated

Supplied with remote triac dimmable constant current LED driver

Select colour temperature prior to installation

60° beam angle



Side Profile



Switch between  
WW-3000K (Warm White)  
NW-4000K (Neutral White)  
CW-5700K (Cool White)



Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>Triac Dimmable Colour Switchable</b>						
EN-DDL134CCT*	13W	3000-5700K	1105lm	85	60°	120mm
EN-DDL186CCT*	18W	3000-5700K	1840lm	102	60°	160mm
EN-DDL188CCT*	18W	3000-5700K	1820lm	101	60°	200mm
EN-DDL258CCT*	25W	3000-5700K	2670lm	107	60°	200mm
EN-DDL358CCT*	35W	3000-5700K	3600lm	103	60°	200mm

\*Add suffix **DA** for DALI or **V** for 1-10V dimmable option

Lumen value based on 4000K



# ClearVu™

GU10 LED Lamps

Sparkling multifaceted lens to replicate a dichroic appearance

Delivering up to 103lm/W

45° beam angle

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

## Cost Effective, Reliable, Low Wattage, GU10 LED lamps



Cat. No.	Base	Watts	Colour	Lumens	lm/W	Beam	Energy Class
<b>Dimmable</b>							
<a href="#">EN-DGU35/30</a>	GU10	3.5W	3000K	350lm	100	45°	A+
<a href="#">EN-DGU35/40</a>	GU10	3.5W	4000K	360lm	103	45°	A++
<b>Non-Dimmable</b>							
<a href="#">EN-GU35/30</a>	GU10	3.5W	3000K	350lm	100	45°	A++
<a href="#">EN-GU35/40</a>	GU10	3.5W	4000K	360lm	103	45°	A++

For dimming compatibility visit [auroralighting.com](http://auroralighting.com)



L1 Exempt

2 Year Warranty

L70 20,000hrs

Dimmable option available

For use in enclosed luminaires

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)


works with

.control

Dimmable GU10



Triac Inline Dimmer




Smart Rotary Dimmer

Non-Dimmable GU10





On/Off Relay

EN-DGU35



EN-GU35



EN-DGU35

(L) 56mm Length  
(OD) 50mm Overall (Ø)

EN-GU35

(L) 56mm Length  
(OD) 50mm Overall (Ø)







## Feature Products

### EdgeLite™<sup>PRO</sup>


**NEW**



See pg.40

### DuoLite™<sup>CS</sup>

**NEW**



See pg.43

### BatPac™<sup>PRO</sup><sup>CS</sup>

**NEW**



See pg.47

### Hydro-Link™

**NEW**



See pg.48





# LED PANELS & LINEARS

# EdgeLite<sup>TM</sup> PRO

LED Edge-Lit Flat Panels

Over 60% energy savings compared to traditional fluorescent

Edge-lit panel for complete uniformity across diffuser

High quality light guide designed to prevent yellowing

SDCM <4 providing consistent light colour quality


Delivering 130lm/W

UGR19

EN-LPP6060 & EN-LPP1230 - IP44 rated from the front

IK06 rated

Suitable for installation in 15 & 24mm T-bar ceilings

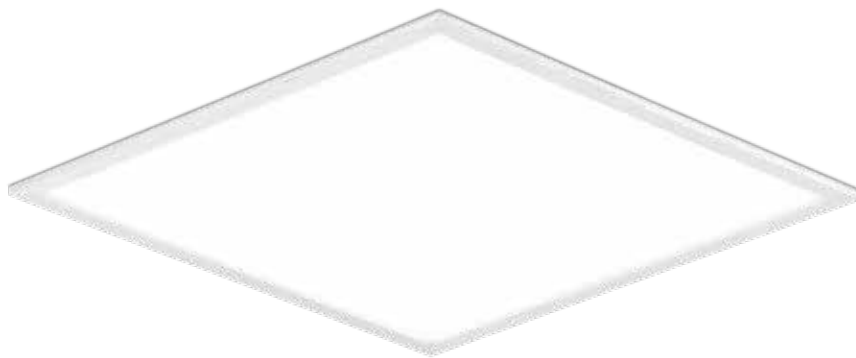

Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
<b>600 x 600mm</b>						
EN-LPP6060*/40 <sup>†</sup>	Non-Dim	26W	4000K	3380lm	130	110°
EN-LPP6060*/50 <sup>†</sup>	Non-Dim	26W	5000K	3380lm	130	110°
<b>1200 x 600mm</b>						
EN-LPP1260*/40 <sup>†</sup>	Non-Dim	40W	4000K	5200lm	130	110°
EN-LPP1260*/50 <sup>†</sup>	Non-Dim	40W	5000K	5200lm	130	110°
<b>1200 x 300mm</b>						
EN-LPP1230*/40 <sup>†</sup>	Non-Dim	26W	4000K	3380lm	130	110°
EN-LPP1230*/50 <sup>†</sup>	Non-Dim	26W	5000K	3380lm	130	110°

## Accessories

EN-LPEM2 3 Hour Emergency Pack for Panel Range

\*Add suffix **DA** for DALI or **V** for 1-10V dimmable options

Surface Mount box, Adjustable Suspension kit & Ceiling Recess Mounts available.

<sup>†</sup>For DALI Emergency - the EM side will not report back



make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

5 Year Warranty

L70 50,000hrs

1-10V & DALI dimmable options

Emergency option

White finish

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)

works with

.control




1-10V Inline Dimmer  
for 1-10V Option




On/Off Relay



EN-LPP6060



EN-LPP1260



EN-LPP1230

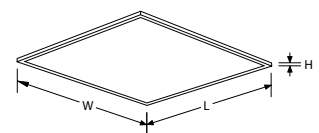

EN-LPP6060

(L) 595mm Length  
(W) 595mm Width  
(H) 10mm Height

EN-LPP1260

(L) 1195mm Length  
(W) 595mm Width  
(H) 10mm Height

EN-LPP1230

(L) 1195mm Length  
(W) 295mm Width  
(H) 10mm Height

5 Year Warranty

L70 50,000hrs

1-10V & DALI dimmable options

White finish



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)

works with

.control



1-10V Inline Dimmer  
for 1-10V Option

1-10V

On/Off Relay

16 A

EN-SU1230B

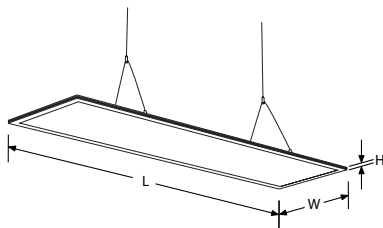

EN-SU1230B

(L) 1195mm Length  
(W) 295mm Width  
(H) 10mm Height

# EdgeLite<sup>TM</sup> PRO

LED Edge-Lit Flat Suspended Panels

Lightweight slim aluminium frame

High quality light guide designed to prevent yellowing

70% down and 30% upward light distribution

Downward light distributes 2800 lumens

Upward light distributes 1200 lumens

SDCM <5 providing consistent light colour quality

Delivering 100lm/W

UGR19


1.2 metre suspension kit provided

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)

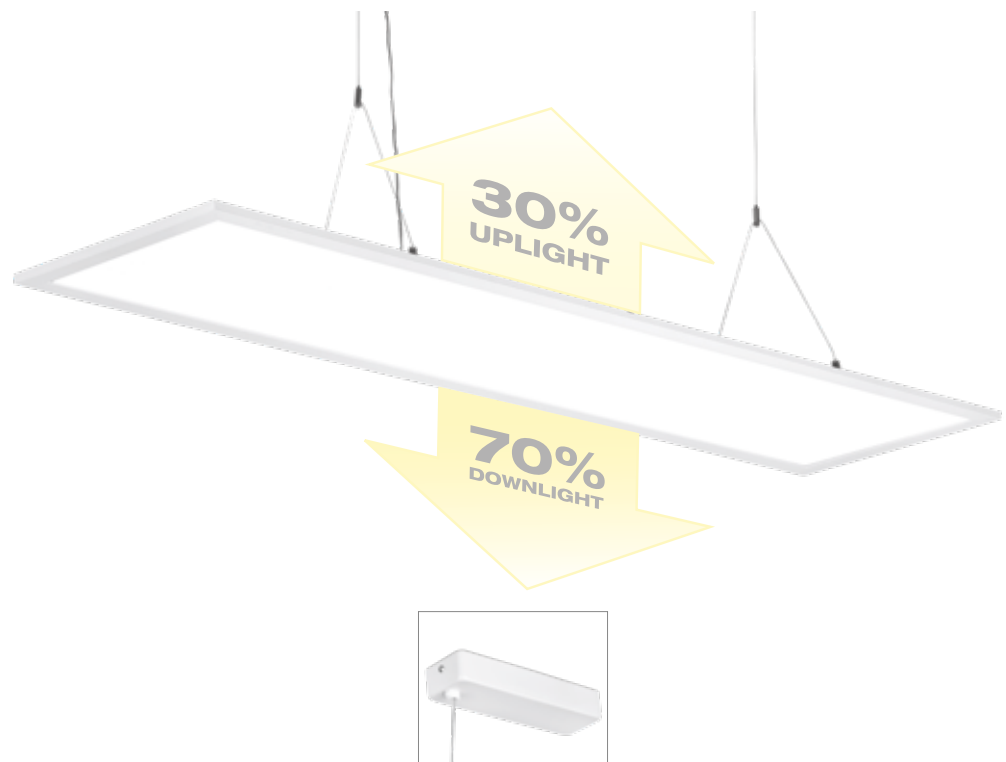

Surface Mount box included

LED Panels



Cat. No.

1200 x 300mm

EN-SU1230B\*40

Type

Non-Dim

Watts

40W

Colour

4000K

Lumens

4000lm

lm/W

100

Beam

110°

\*Add suffix **DA** for DALI or **V** for 1-10V dimmable options



# DuoLite™

## Troffer LED Panel 600 x 600mm

Designed to produce direct and indirect light, reducing glare and enhancing visual comfort

Opal polycarbonate diffuser for even light distribution

High quality light guide designed to prevent yellowing

Delivering 103lm/W

UGR19

Suitable for installation in 15 & 24mm T-bar ceilings



make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

3 Year Warranty

L70 50,000hrs

1-10V & DALI dimmable options

Emergency option

White finish

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control


1-10V

1-10V Inline Dimmer  
for 1-10V Option

16 A

On/Off Relay

EN-TF6060B




Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
<b>600 x 600mm</b>						
<a href="#">EN-TF6060B/40</a>	Non-Dim	36W	4000K	3700lm	103	90°
<a href="#">EN-TF6060B5/40</a>	Non-Dim	36W	4000K	3700lm	103	90°
<a href="#">EN-TF6060BDA/40†</a>	DALI	36W	4000K	3700lm	103	90°
<a href="#">EN-TF6060BV/40</a>	1-10V	36W	4000K	3700lm	103	90°

### Accessories

[EN-LPEM2](#) 3 Hour Emergency Pack for Panel Range

†For DALI Emergency - the EM side will not report back



[EN-TF6060B](#)

(L) 597mm Length  
(W) 597mm Width  
(H) 49mm Height



3 Year Warranty

L70 50,000hrs

1-10V & DALI dimmable options

Emergency option

White finish

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)

works with

.control



1-10V Inline Dimmer  
for 1-10V Option

1-10V

On/Off Relay

16 A

EN-TF6060CCT



EN-TF6060CCT

(L) 597mm Length  
(W) 597mm Width  
(H) 49mm Height

# DuoLite<sup>TM</sup>CS

Colour Switchable Troffer LED Panel 600 x 600mm

make smart with



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)

Switch between 3000K, 4000K or 5700K

Designed to produce direct and indirect light, reducing glare and enhancing visual comfort

Opal polycarbonate diffuser for even light distribution

High quality light guide designed to prevent yellowing

Delivering up to 103lm/W (at 4000K)

Select colour temperature prior to installation

UGR19

Suitable for installation in 15 & 24mm T-bar ceilings



Switch between  
WW-3000K (Warm White)  
NW-4000K (Neutral White)  
CW-5700K (Cool White)



Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
<b>600 x 600mm Colour Switchable</b>						
<a href="#">EN-TF6060CCT</a>	Non-Dim	36W	3000-5700K	3700lm	103	90°
<a href="#">EN-TF6060CCT5</a>	Non-Dim	36W	3000-5700K	3700lm	103	90°
<a href="#">EN-TF6060CCTDA<sup>†</sup></a>	DALI	36W	3000-5700K	3700lm	103	90°
<a href="#">EN-TF6060CCTV</a>	1-10V	36W	3000-5700K	3700lm	103	90°

## Accessories

[EN-LPEM2](#)

3 Hour Emergency Pack for Panel Range

<sup>†</sup>For **DALI Emergency** - the **EM** side will not report back  
Lumen value based on 4000K



## Up to 111 lm/W

IK08 and IP65 rated with anti-tamper stainless steel clips providing full fitting security

**NOW COMES WITH  
5 YEAR WARRANTY**



Linears

Single and Twin Body



LED chips on board evenly distributed to provide maximum even light output

IP65 Rated Glands



IP65 rated glands at both ends provided as standard and stainless steel anti-tamper clips

5 Year Warranty

L70 50,000hrs

Emergency option

Microwave sensing option

Grey base, opal diffuser finish



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)


works with

.control



On/Off Relay

16 A

EN-ANT1525B



EN-ANT1558B

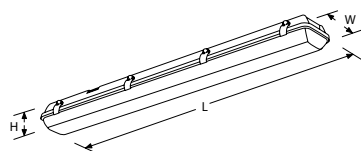

EN-ANT1217B

(L) 1270mm Length  
(W) 85mm Width  
(H) 80mm Height

EN-ANT1240B

(L) 1270mm Length  
(W) 118mm Width  
(H) 80mm Height

EN-ANT1525B

(L) 1570mm Length  
(W) 85mm Width  
(H) 80mm Height

EN-ANT1558B

(L) 1570mm Length  
(W) 118mm Width  
(H) 80mm Height

EN-ANT1834B

(L) 1870mm Length  
(W) 85mm Width  
(H) 80mm Height

EN-ANT1869B

(L) 1870mm Length  
(W) 118mm Width  
(H) 80mm Height

# LinearPac™

IP65 LED Anti-Corrosives

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

Designed to directly replace single or twin lamp fluorescent fittings in size and output

Over 50% energy savings compared to traditional fluorescent

Clip in gear tray for ease of installation and maintenance

Fully polycarbonate diffuser and base (6ft base is ABS)

IP65 rated

2x IP65 rated cable glands supplied

IK08 rated impact resistance

20mm conduit entry at both ends and at the rear

Delivering up to 111lm/W

Stainless steel anti-tamper clips

Adjustable light detector from 2-50 lux for microwave option

Adjustable hold time of 5 seconds to 15 minutes for microwave option

-20° to 40° ambient operating temperature



Linears

Cat. No.	Type	Watts	Colour	Lumens	lm/W	T8 Subst.	Length (ft)
<b>Single</b>							
EN-ANT1217B <sup>†</sup> /40	Non-Dim	20W	4000K	2200lm	110	1 x 36	4
EN-ANT1525B <sup>†</sup> /40	Non-Dim	30W	4000K	3300lm	110	1 x 58	5
EN-ANT1834B <sup>†</sup> /40	Non-Dim	35W	4000K	3850lm	110	1 x 72	6
<b>Twin</b>							
EN-ANT1240B <sup>†</sup> /40	Non-Dim	38W	4000K	4200lm	111	2 x 36	4
EN-ANT1558B <sup>†</sup> /40	Non-Dim	60W	4000K	6600lm	110	2 x 58	5
EN-ANT1869B <sup>†</sup> /40	Non-Dim	70W	4000K	7700lm	110	2 x 72	6

\*Add suffix **EM** for **Emergency** option.

<sup>†</sup>Add suffix **EM** or **MS** for **Emergency** or **Microwave Sensor** options.



# BatPac<sup>PRO</sup>

LED Battens With Push Clip Release

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

- Updated design with a push clip release mechanism at each end
- Hinged gear tray for fast installation
- Delivering up to 127lm/W
- Opal polycarbonate diffuser
- IK08 rated impact resistance
- Knockouts for cable entry on both ends
- Push-fit terminals
- Multiple BESA mounting points (matches traditional fluorescent)
- Adjustable light detector from 2-50 lux for microwave option
- Adjustable hold time of 5 seconds to 30 minutes for microwave option
- Can be surface mounted or suspended



Quick Release Hinged  
Gear Tray for Faster  
Installation

Cat. No. Type Watts Colour Lumens lm/W T8 Subst. Length (ft)

## Single

EN-BA1222*/30	Non-Dim	22W	3000K	2400lm	109	1 x 36W	4
EN-BA1222*/40	Non-Dim	22W	4000K	2800lm	127	1 x 36W	4
EN-BA1533*/30	Non-Dim	33W	3000K	3600lm	109	1 x 58W	5
EN-BA1533*/40	Non-Dim	33W	4000K	4100lm	124	1 x 58W	5
EN-BA1839*/30	Non-Dim	39W	3000K	4300lm	110	1 x 72W	6
EN-BA1839*/40	Non-Dim	39W	4000K	4900lm	126	1 x 72W	6

## Twin

EN-BA1243*/30	Non-Dim	43W	3000K	4800lm	112	1 x 36W	4
EN-BA1243*/40	Non-Dim	43W	4000K	5300lm	123	1 x 36W	4
EN-BA1563*/30	Non-Dim	63W	3000K	7000lm	111	1 x 58W	5
EN-BA1563*/40	Non-Dim	63W	4000K	7800lm	124	1 x 58W	5
EN-BA1873*/30	Non-Dim	73W	3000K	8000lm	110	1 x 72W	6
EN-BA1873*/40	Non-Dim	73W	4000K	9100lm	125	1 x 72W	6

\*Add suffix EM or MS for Emergency or Microwave Sensor options.

For EMMS (Emergency Microwave Sensor) options please contact sales.



5 Year Warranty

L70 50,000hrs

Emergency option

Microwave sensing option

White finish

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)



works with

.control



On/Off Relay

EN-BA1533

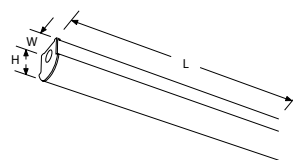

EN-BA1222

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1533

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1839

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1243

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1563

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1873

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height

5 Year Warranty

L70 50,000hrs

Emergency option

White finish



For Information about AOne ZIGBEE

Visit [auroralighting.com](http://auroralighting.com)



works with

.control

On/Off Relay

16A

EN-BA1533CCT

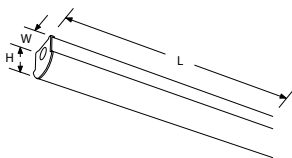

EN-BA1222CCT

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1533CCT

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1839CCT

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1243CCT

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1563CCT

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1873CCT

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height

# BatPac<sup>TM</sup>PROCS

Colour Switchable LED Battsens  
With Push Clip Release

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

Colour switchable between 3000K, 4000K and 6300K (switch in gear tray)

Updated design with a push clip release mechanism at each end

Hinged gear tray for fast installation

Delivering up to 130lm/W (at 4000K)

Opal polycarbonate diffuser

IK08 rated impact resistance

Knockouts for cable entry on both ends

Push-fit terminals

Multiple BESA mounting points (matches traditional fluorescent)

Adjustable light detector from 2-50 lux for microwave option

Adjustable hold time of 5 seconds to 30 minutes for microwave option

Can be surface mounted or suspended



Linears



Quick Release  
Hinged Gear Tray for  
Faster Installation



Switch between  
WW-3000K (Warm White)  
NW-4000K (Neutral White)  
CW-6300K (Cool White)



Cat. No.	Type	Watts	Colour	Lumens	lm/W	T8 Subst.	Length (ft)
----------	------	-------	--------	--------	------	-----------	-------------

## Single Colour Switchable

EN-BA1222CCT*	Non-Dim	20W	3000-6300K	2600lm	130	1 x 36W	4
---------------	---------	-----	------------	--------	-----	---------	---

EN-BA1533CCT*	Non-Dim	30W	3000-6300K	3900lm	130	1 x 58W	5
---------------	---------	-----	------------	--------	-----	---------	---

EN-BA1839CCT*	Non-Dim	40W	3000-6300K	5200lm	130	1 x 72W	6
---------------	---------	-----	------------	--------	-----	---------	---

## Twin Colour Switchable

EN-BA1243CCT*	Non-Dim	40W	3000-6300K	5200lm	130	1 x 36W	4
---------------	---------	-----	------------	--------	-----	---------	---

EN-BA1563CCT*	Non-Dim	60W	3000-6300K	7800lm	130	1 x 58W	5
---------------	---------	-----	------------	--------	-----	---------	---

EN-BA1873CCT*	Non-Dim	65W	3000-6300K	8400lm	129	1 x 72W	6
---------------	---------	-----	------------	--------	-----	---------	---

\*Add suffix **EM** for **Emergency** options.  
Lumen value based on 4000K





# Hydro-Link™

IP66 Linkable LED Anti-Corrosives

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

- Vandal resistant high impact polycarbonate housing
- Opal diffuser to provide smooth even light distribution
- Adjustable push fit terminals at either end for quicker installation and through wiring
- Delivering up to 120lm/W
- IP66 rated
- IK10 rated
- 2 x IP66 rated cable glands supplied
- 20° to 40° ambient operating temperature

3 Year Warranty

L70 40,000hrs

Opal diffuser finish

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

16 A

On/Off Relay




IP66 rated cable gland




Easy access terminal block for faster install

EN-ANTL1555



Cat. No.	Watts	Colour	Lumens	lm/W	T8 Subst.	Length (ft)
<a href="#">EN-ANTL1238/40</a>	38W	4000K	4400lm	116	1 x 36W	4
<a href="#">EN-ANTL1555/40</a>	55W	4000K	6600lm	120	1 x 58W	5




[EN-ANTL1238](#)

(L) 1227mm Length  
(W) 67mm Width  
(H) 70mm Height

[EN-ANTL1555](#)

(L) 1510mm Length  
(B) 67mm Width  
(H) 70mm Height

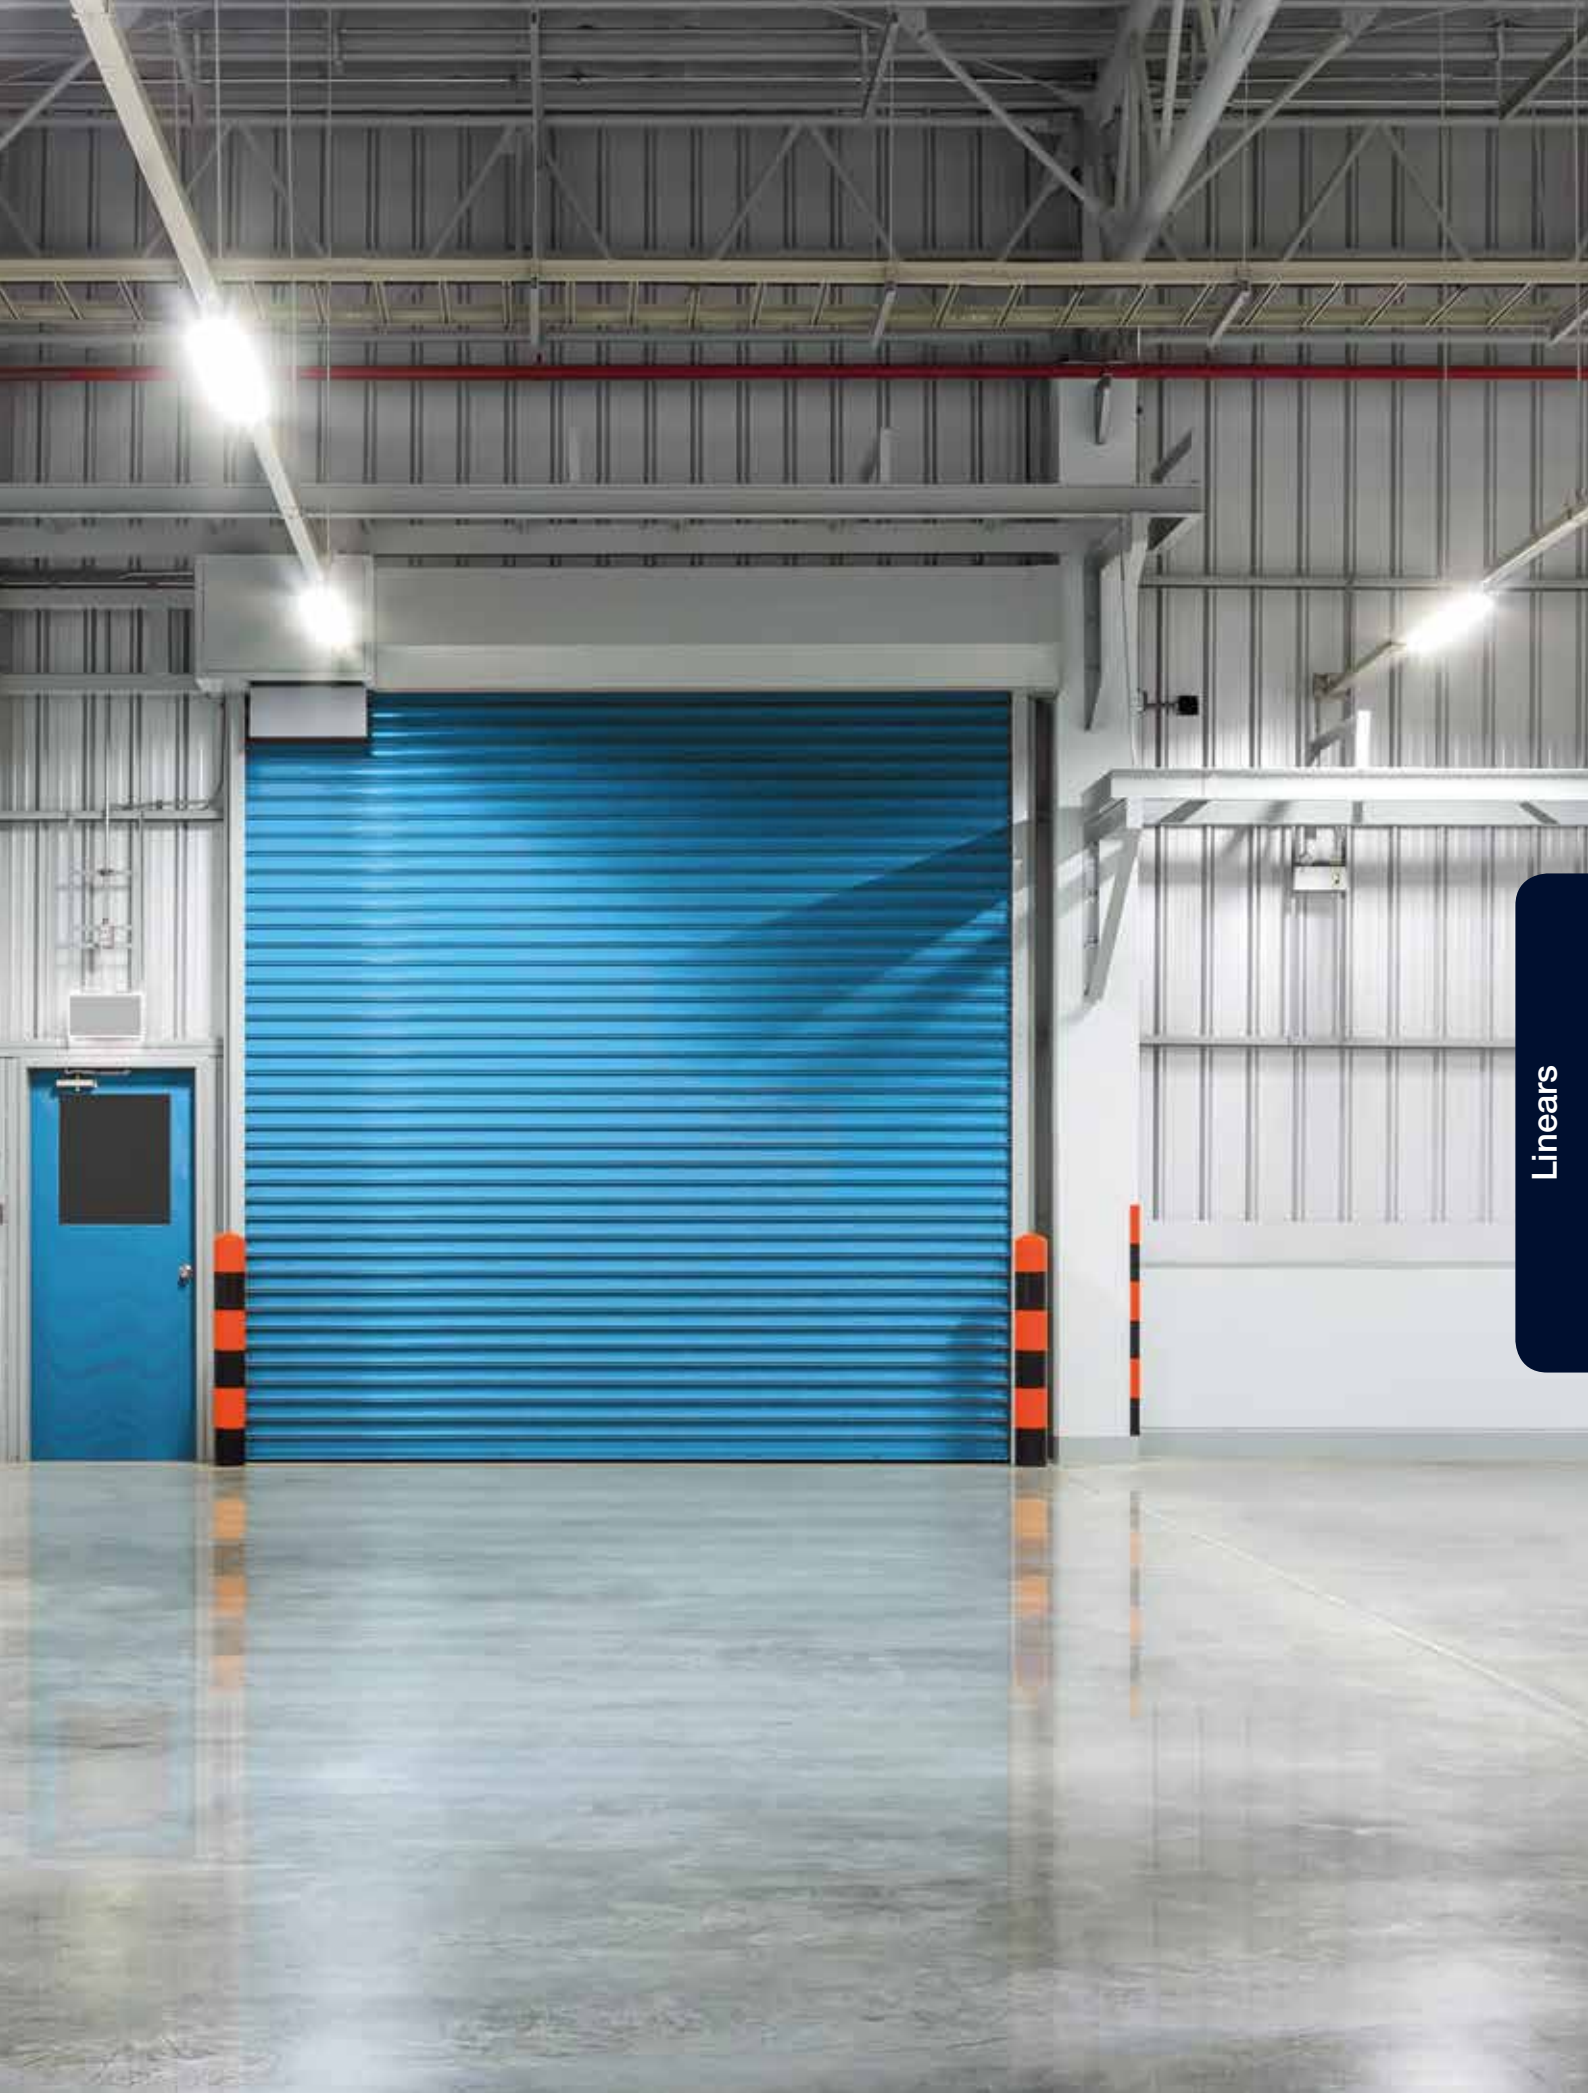

Linears

## Feature Product

**Cosmos™**

**NEW**



See pg.52







# LED HIGHBAY

# Cosmos™

High Power Non Dimmable LED Highbay

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

- Up to 26,000 lumen output
- Delivering 130lm/W
- IP65 rated
- IK08 rated impact resistance
- 30° to 50° working temperature
- Pre-wired with 1.5m cable
- 120° beam angle
- Optional 60° lens available (sold separately)

5 Year Warranty

L70 50,000hrs

Black finish

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

16 A

On/Off Relay




60° accessory  
for 100W




60° accessory  
for 150W & 200W


Standard 120° Lens



Optional 60° Lens



Cat. No.	Watts	Colour	Lumens	lm/W	Beam Angle	Net Weight
<b>Non-Dimmable</b>						
<a href="#">EN-HBE100/40</a>	100W	4000K	13000lm	130	120°	2.3kg
<a href="#">EN-HBE150/40</a>	150W	4000K	19500lm	130	120°	2.7kg
<a href="#">EN-HBE200/40</a>	200W	4000K	26000lm	130	120°	3.3kg
<b>Accessories</b>						
<a href="#">EN-HBL60A</a>	60° Lens for Cosmos™ EN-HBE100					
<a href="#">EN-HBL60B</a>	60° Lens for Cosmos™ EN-HBE150 & EN-HBE200					

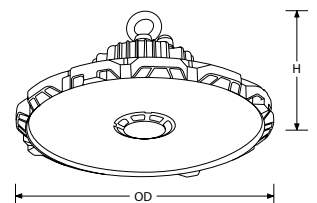

**EN-HBE100**

(H) 160mm Height  
(OD) 270mm Overall (Ø)

**EN-HBE150**

(H) 160mm Height  
(OD) 310mm Overall (Ø)

**EN-HBE200**

(H) 170mm Height  
(OD) 310mm Overall (Ø)





## Feature Products

**Klay™**

**NEW**



See pg.56

**LEDline™ COB**

**NEW**



See pg.60

**LEDline™ PRO**

**NEW**



See pg.62

**LED Drivers**

**NEW**



See pg.64







# LED WALL LIGHTS & STRIP

# Klay™

IP65 multi-directional wall light

High quality die cast aluminium body

Direct and indirect lighting

Adjustable reflectors allow for a range of symmetric and asymmetric beam angles

IP65 rated

IK06 Rated

Supplied with integral non-dimmable LED driver

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

3 Year Warranty

L70 50,000hrs

Black or White finish options

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

16 A


On/Off Relay




Single




Twin




15° 30°



45° 60°



15° 30°




45° 60°




Cat. No.	Description	Watts	Colour	Lumens
<b>Non-Dimmable</b>				
EN-WL10*/40	Single	10W	4000K	1210lm
EN-WL18*/40	Twin	18W	4000K	1710lm

\*Add suffix **W** or **BLK** for White or Black finishes.



EN-WL10

(L) 120mm Length  
(H) 100mm Height  
(P) 98mm Projection

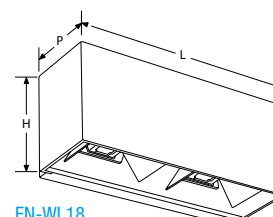

EN-WL18

(L) 242mm Length  
(H) 100mm Height  
(P) 98mm Projection





# Waiz™CS

Flush Low Level Floor Washer

Colour switchable between 2700K, 3000K and 4000K

Aluminium body and diffuser

Super slim 5mm square bezel (sold separately)

Select colour temperature before attaching the bezel

Designed for use with single gang back boxes (length 83mm x width 83mm x depth 35mm)



Black Bezel



White Bezel

(Bezel sold separately)



Colour Switchable  
between 2700K,  
3000K & 4000K



Cat. No.	Watts	Colour	Lumens
<b>Non-Dimmable</b>			
<b>EN-FW1</b>	4W	2700-4000K	100-175lm

#### Accessories

**EN-FWB2\*** Waiz™ Square bezel for EN-FW1

\*Add suffix **W** or **BLK** for White or Black finishes.



make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

5 Year Warranty

L70 50,000hrs

White or Black bezel options

make smart with




For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control




On/Off Relay

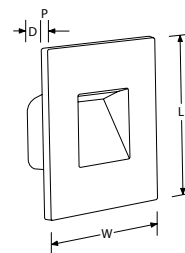

**EN-FW1 + EN-FWB2**

- (L) 85mm Length
- (W) 85mm Width
- (P) 5mm Projection
- (D) 32mm Depth

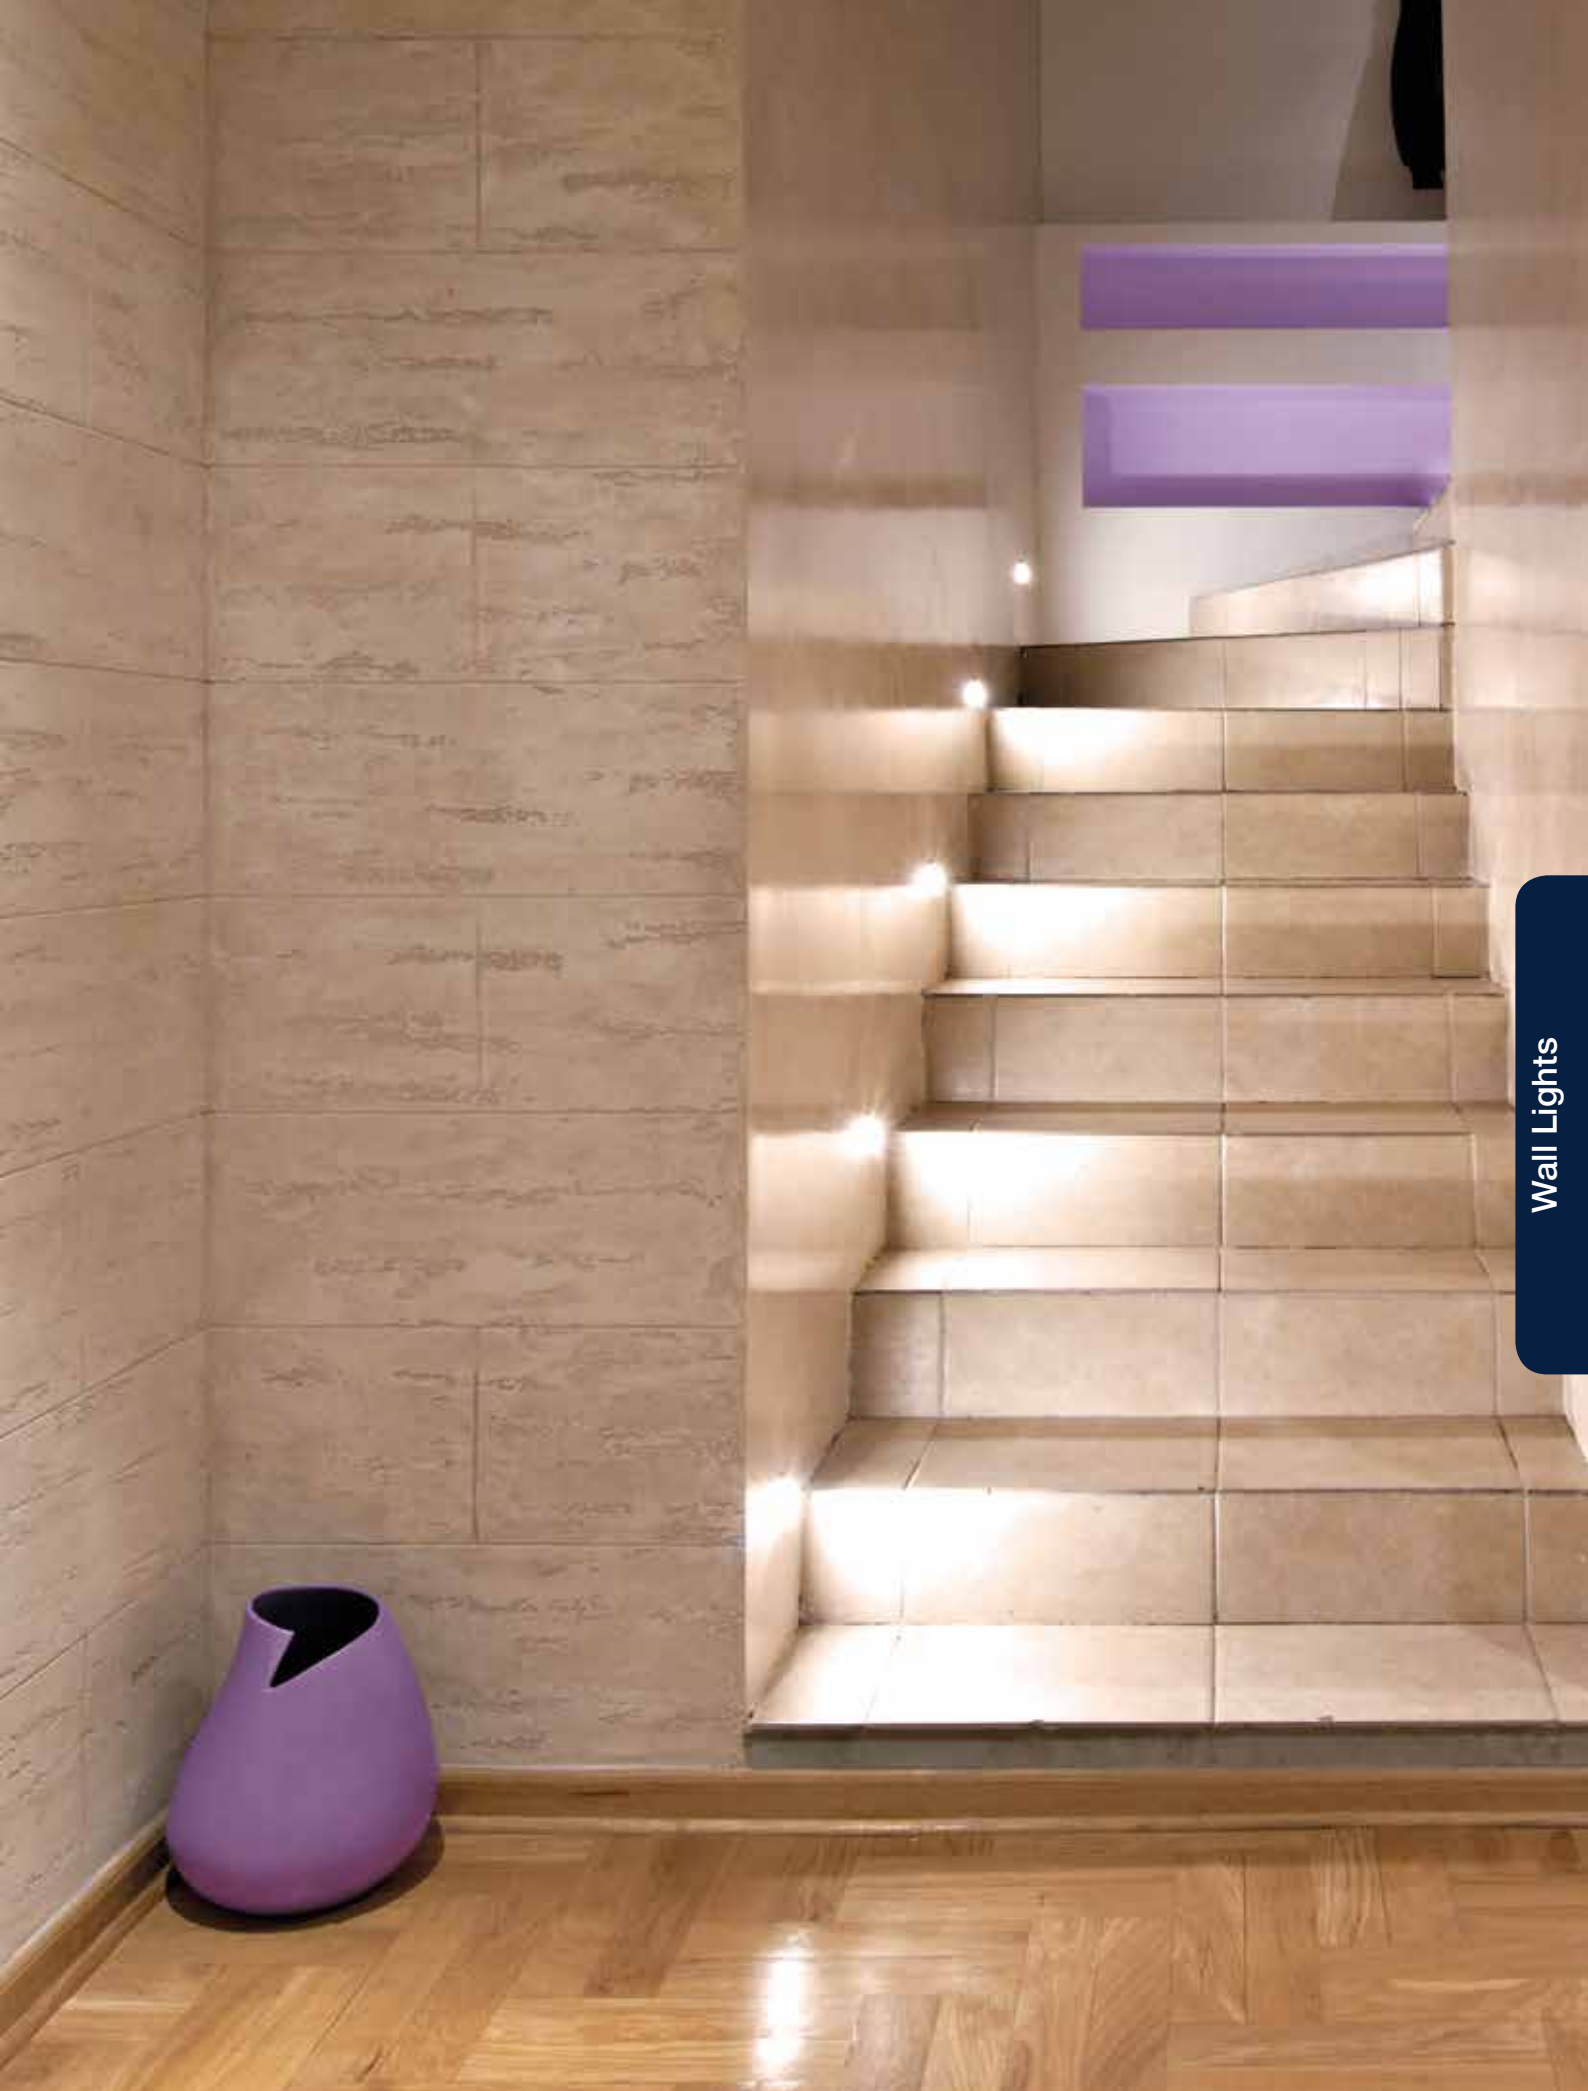

Wall Lights

# LEDline<sup>TM</sup> COB

## 24V Ultra Bright COB LED Strip

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

3 Year Warranty

L70 35,000hrs

2700K, 3000K &  
4000K colour options

Single colour COB flexible LED strip with 3M<sup>TM</sup> self adhesive backing  
COB strip provides a run of continuous light, eliminating LED hot spots  
Cut points every 45mm for maximum flexibility  
Beam angle of 180° and 528 LEDs per metre  
For runs over 5m individual lengths should be connected in parallel  
Reel length 5m or 20m - See pg.66 for cutting service

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

▲ 12/24

12/24V Inline Controller

▲ 16 A

On/Off Relay



Cat. No.	Watts/m	No. of LEDs/m	Colour	lm/m
<a href="#">EN-ST1024/27</a>	10W	528	2700K	950lm
<a href="#">EN-ST1024/30</a>	10W	528	3000K	950lm
<a href="#">EN-ST1024/40</a>	10W	528	4000K	1000lm

### Accessories

<a href="#">EN-ST1024A</a>	LEDLine <sup>TM</sup> COB Single Colour Strip Connector
<a href="#">EN-ST1024B</a>	LEDLine <sup>TM</sup> COB Single Colour Wired Strip Connector
<a href="#">EN-ST1024C</a>	LEDLine <sup>TM</sup> COB Single Colour Inter-Connection Strip Connector

[EN-ST1024A](#)



[EN-ST1024B](#)




[EN-ST1024C](#)



Cat. No.	Description	Metres per driver
<b>LED Drivers</b>		
<a href="#">AU-LED1624CV</a>	16W Non-Dimmable 24V Constant Voltage Driver	1m
<a href="#">EN-LED7524</a>	75W Non-Dimmable 24V Constant Voltage Driver	5m
<a href="#">AU-LEDD9024</a>	90W IP67 1-10V Dimmable 24V Constant Voltage Driver	8m
<a href="#">EN-LED12024</a>	120W Non-Dimmable 24V Constant Voltage Driver	10m

For full range of LED drivers visit [auroralighting.com](http://auroralighting.com)



3 Year Warranty

L70 35,000hrs

2700K, 3000K &  
4000K colour options

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

12/24V Inline Controller

12/24

On/Off Relay

16A




EN-ST1024IPCK

#### IP Rated Kit Includes

- 2 power leads
- 2 end caps
- 4 starter sleeves
- 1 tube of sealant
- 6 fixing clips
- 12 fixing screws

Requires soldering



# LEDline<sup>TM</sup> COB

24V IP67 Ultra Bright COB LED Strip

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

Single colour COB flexible IP67 LED strip with 3M<sup>TM</sup> self adhesive backing

COB strip provides a run of continuous light, eliminating LED hot spots

Cut points every 45mm for maximum flexibility

Beam angle of 180° and 528 LEDs per metre

For runs over 5m individual lengths should be connected in parallel

Reel length 10m - See pg.66 for cutting service



Cat. No.	Watts/m	No. of LEDs/m	Colour	lm/m
EN-ST1024IP/27	10W	528	2700K	900lm
EN-ST1024IP/30	10W	528	3000K	900lm
EN-ST1024IP/40	10W	528	4000K	950lm

#### Accessories

Cat. No.	Description
EN-ST1024IPCK	LEDLine <sup>TM</sup> COB IP67 Strip Connector Kit

Cat. No.	Description	Metres per driver
<b>LED Drivers</b>		
AU-LED1624IP	16W IP68 Non-Dimmable 24V Constant Voltage Driver	1m
AU-LED6024IP	60W IP67 Non-Dimmable 24V Constant Voltage Driver	5m
AU-LEDD9024	90W IP67 1-10V Dimmable 24V Constant Voltage Driver	8m
AU-ELG-150-24	150W IP67 Non-Dimmable 24V Constant Voltage Driver	10m

For full range of LED drivers visit [auroralighting.com](http://auroralighting.com)



# LEDline<sup>TM</sup> PRO

## 24V Ultra Bright LED Strip

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

3 Year Warranty

L70 35,000hrs

3000K, 4000K &  
6300K colour options

High density single colour flexible LED strip with 3M<sup>TM</sup> self adhesive backing

Cut points every 100mm for maximum flexibility

Beam angle of 120° and 17mm between LEDs, 60 LEDs per metre

For runs over 5m individual lengths should be connected in parallel

Reel length 10m or 30m - See pg.66 for cutting service



Cat. No.	Watts/m	No. of LEDs/m	Colour	lm/m
EN-ST524/30	14.4W	60	3000K	1200lm
EN-ST524/40	14.4W	60	4000K	1250lm
EN-ST524/60	14.4W	60	6300K	1280lm

### Accessories

EN-ST524A	LEDLine <sup>TM</sup> PRO Single Colour Strip Connector
EN-ST524B	LEDLine <sup>TM</sup> PRO Single Colour Wired Strip Connector
EN-ST524C	LEDLine <sup>TM</sup> PRO Single Colour Inter-Connection Strip Connector

Cat. No.	Description	Metres per driver
<b>LED Drivers</b>		
AU-LED1624CV	16W Non-Dimmable 24V Constant Voltage Driver	1m
EN-LED7524	75W Non-Dimmable 24V Constant Voltage Driver	5m
EN-LED12024	120W Non-Dimmable 24V Constant Voltage Driver	8m
EN-LEDD15024	150W Triac Dimmable 24V Constant Voltage Driver	10m

For full range of LED drivers visit [auroralighting.com](http://auroralighting.com)



make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

A12/24

12/24V Inline Controller

A 16 A

On/Off Relay


EN-ST524A



EN-ST524B



EN-ST524C

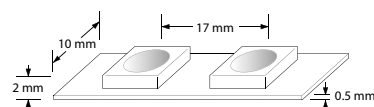



3 Year Warranty

L70 35,000hrs

3000K, 4000K &  
6400K colour options



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

works with

.control

12/24V Inline Controller

A 12/24

On/Off Relay

A 16 A




EN-STIPCK5

#### IP Rated Kit Includes

- 2 power leads
- 2 end caps
- 4 heat shrink sleeves
- 1 tube of sealant
- 6 fixing clips
- 12 fixing screws

Requires soldering

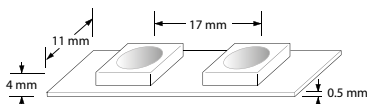

## LEDline<sup>TM</sup> PRO

### 24V IP67 Ultra Bright LED Strip

make smart with



For Information about AOne ZIGBEE  
Visit [auroralighting.com](http://auroralighting.com)

High density IP67 single colour flexible LED strip with 3M<sup>TM</sup> self adhesive backing

Cut points every 100mm for maximum flexibility

Beam angle of 120° and 17mm between LEDs, 60 LEDs per metre

For runs over 5m individual lengths should be connected in parallel

Reel length 10m - See pg.66 for cutting service



Cat. No.	Watts/m	No. of LEDs/m	Colour	lm/m
<a href="#">EN-ST524IP/30</a>	14.4W	60	3000K	1200lm
<a href="#">EN-ST524IP/40</a>	14.4W	60	4000K	1250lm
<a href="#">EN-ST524IP/60</a>	14.4W	60	6400K	1280lm

#### Accessories

[EN-STIPCK5](#)

LEDLine<sup>TM</sup> PRO IP67 Strip Connector Kit

Cat. No.	Description	Metres per driver
<b>LED Drivers</b>		
<a href="#">AU-LED1624IP</a>	16W IP68 Non-Dimmable 24V Constant Voltage Driver	1m
<a href="#">AU-LEDD9024</a>	90W IP67 1-10V Dimmable 24V Constant Voltage Driver	5m
<a href="#">AU-ELG-150-24</a>	150W IP67 Non-Dimmable 24V Constant Voltage Driver	8m
<a href="#">AU-ELG-200-24</a>	200W IP67 Non-Dimmable 24V Constant Voltage Driver	10m

For full range of LED drivers visit [auroralighting.com](http://auroralighting.com)



# Non-Dimmable LED Drivers

## IP67 Constant Voltage

Range of 12/24V constant voltage IP67 non-dimmable LED drivers for use with Aurora LED strip.

3 year warranty



AU-LED2412IP



24W IP67 Non-Dimmable 12V Constant Voltage Driver

AU-LED2424IP



24W IP67 Non-Dimmable 24V Constant Voltage Driver

AU-LED6012IP



60W IP67 Non-Dimmable 12V Constant Voltage Driver

AU-LED6024IP



60W IP67 Non-Dimmable 24V Constant Voltage Driver

LED Strip



Cat. No.	Input Voltage	Output Voltage (V DC)	Nominal Power	Max. Amb Temp (°C)	Dimensions
AU-LED2412IP	220-240V 50Hz	12V	24W	40	121 x 38 x 26mm
AU-LED2424IP	220-240V 50Hz	24V	24W	40	121 x 38 x 26mm
AU-LED6012IP	220-240V 50Hz	12V	60W	40	166 x 43 x 33mm
AU-LED6024IP	220-240V 50Hz	24V	60W	40	166 x 43 x 33mm






LED Strip



As our most versatile lighting solution, our LED strip and flex works perfectly in an array of applications and it comes as no surprise that these solutions are more in-demand than ever. As a result, we're making it even easier for you to incorporate LED strip into a lighting design scheme. You can receive custom lengths of our popular LED strip and flex, pre-cut to your specification. We aim to despatch 48 hours from receipt of your order.

Contact your local sales representative or our friendly sales team via telephone 01707 228 700 or email: [info@groupaurora.com](mailto:info@groupaurora.com) or visit [auroralighting.com](http://auroralighting.com)

## LED Strip 48 Hour Bespoke Cutting Service

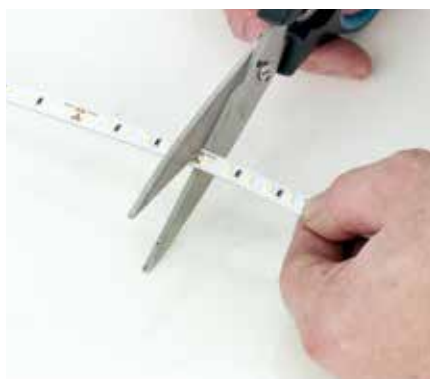

**Non IP Rated** Strip cut to required length



**Non IP Rated** LED strip cut and soldered to pre ordered length



**Non IP Rated** LED strip connections heat sealed



**IP Rated** Strip cut to required length



**IP Rated** LED strip cut, soldered and heat sealed to pre ordered length



**IP Rated** LED strip connections heat sealed



**Watch Video**




**NEW** LED Super Bright 24V COB CRI80

All LED strip requires an LED driver which must be ordered separately  
For full range of LED drivers visit [auroralighting.com](http://auroralighting.com)


## LED Strip Configurator

Visit the Aurora website to use our new LED strip configurator tool, which can help identify the strip that is best suited to your application. Results include strip, LED driver plus channel options.


Visit [auroralighting.com/ledconfigurator](http://auroralighting.com/ledconfigurator)

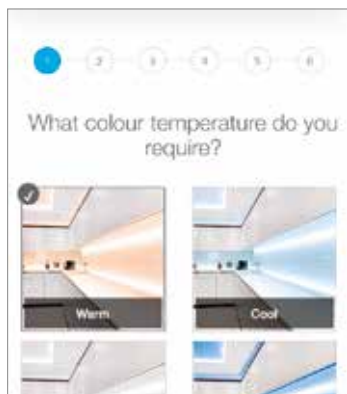

Step 1 Colour Temp

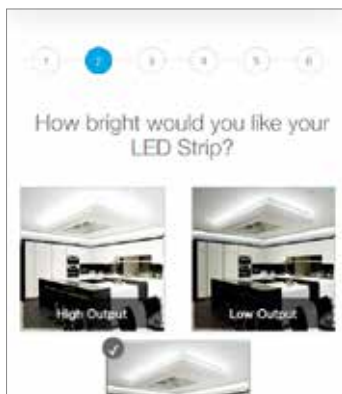


Step 2 Brightness

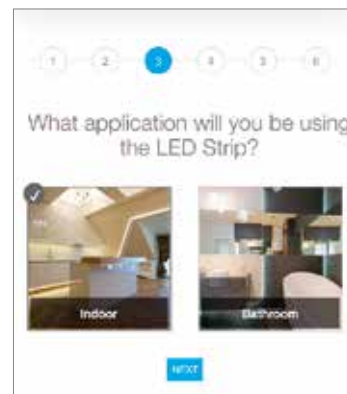


Step 3 Application



Step 4 Length

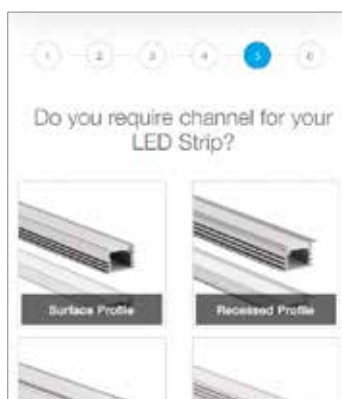


Step 5 Channel

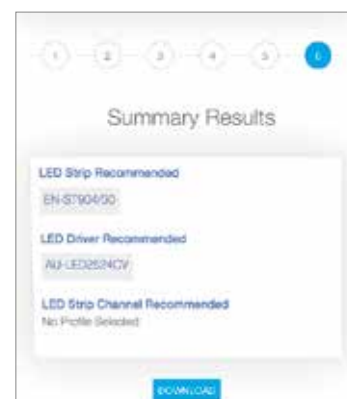

Step 6 Summary

Cat. No.	Diffuser Cover
EN-CH100*	
EN-CH101*	EN-CHPC1CL* (clear)
EN-CH103*	EN-CHPC1FR* (frosted)
EN-CH104*	
EN-CH105*	EN-CHPC2FR* (frosted)
EN-CH106*KIT	Diffuser included
EN-CH109*KIT	Diffuser included

\*Add suffix 1 or 2 for 1m or 2m Length

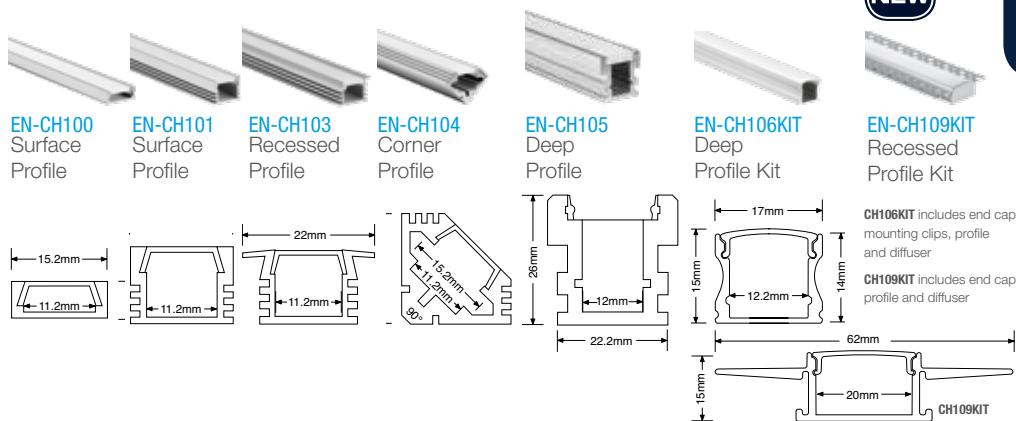

LED Profile / LED Strip Compatibility	ST1024	ST1024RP	ST524	ST524RP
EN-CH100	✓	✗	✓	✗
EN-CH101	✓	✗	✓	✗
EN-CH103	✓	✗	✓	✗
EN-CH104	✓	✗	✓	✗
EN-CH105*	✓	✗	✓	✓
EN-CH106KIT	✓	✓	✓	✓
EN-CH109KIT	✓	✓	✓	✓

See table below for codes for End Caps (with and without cable entry) and Mounting Options

Cat. No.	End Cap	Mounting Option
	Without Cable Entry	With Cable Entry
EN-CH100	EN-CH100EC1	EN-CH100EC2
EN-CH101	EN-CH101EC1	EN-CH101EC2
EN-CH102	EN-CH102EC1	EN-CH102EC2
EN-CH103	EN-CH103EC1	EN-CH103EC2
EN-CH104	EN-CH104EC1	EN-CH104EC2
EN-CH105	EN-CH105EC1	EN-CH105EC2
		Mounting Clip
EN-CH100		EN-CHC1
EN-CH101		EN-CHC1
EN-CH102		-
EN-CH103		-
EN-CH104		EN-CHC2
EN-CH105		-

\*Diffuser requires securing with a silicon sealant (not included).

Please note: strip connectors do not fit inside the channel.



## Feature Products

### Emergency

**NEW**



See pg.70

### Emergency

**NEW**



See pg.70





# EMERGENCY

# Emergency

## 3W Emergency Downlight

Non-maintained LED emergency downlight with interchangeable lenses

Interchangeable lenses offer a corridor (75° beam angle) or open space (120° beam angle) light distribution

3 hour emergency duration

Compact downlight fits into a 45-48mm cut-out

EN-EMLD5 - Manual test (push button or key switch)

EN-EMLD5ST - Self test




Open Area Lens




Corridor Lens

Corridor Lens



Open Area Lens




Can be retrofitted into existing installations



Cat. No.	Description	Max (W)	Colour	Lumens
EN-EMLD5	Manual Test	3W	6000K	270lm
EN-EMLD5ST	Self Test	3W	6000K	270lm
AU-DLEMB2B	Emergency Pack for Primo™ module downlight			
AU-FRLM10EMB	Emergency Pack for X series, A series and mPro series downlights			




See auroralighting.com for product compatibility

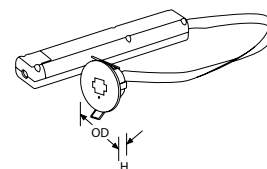

EN-EMLD5

(OD) 60mm Overall Ø  
(H) 26mm Height

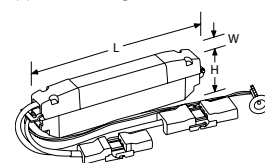

AU-DLEMB2

(L) 250mm Length  
(W) 60mm Width  
(H) 35mm Height

AU-FRLM10EMB

(L) 270mm Length  
(W) 35mm Width  
(H) 66mm Height



Emergency



# Index

Cat. No.	Pg.	Cat. No.	Pg.	Cat. No.	Pg.	Cat. No.	Pg.
AU-A1BTCWS2M	11	AU-A6PRO/40	25	AU-BZ600MW	29	EN-ANT1217B/40	45
AU-A1BTCWS3M	11	AU-ADFRFC	30	AU-BZ600PC	29	EN-ANT1217BEM/40	45
AU-A1BTCWSK1	11	AU-ADGUST1BIP	31	AU-BZ600SN	29	EN-ANT1240B/40	45
AU-A1BTCWSK4	11	AU-ADGUST1BOV	31	AU-BZ600W	29	EN-ANT1240BEM/40	45
AU-A1BTCX7	5	AU-ADGUST1BPN	31	AU-BZ605W	29	EN-ANT1240BMS/40	45
AU-A1BTD10CW	7	AU-ADGUST1BRB	31	AU-BZA4MW	27	EN-ANT1525B/40	45
AU-A1BTE14CW	15	AU-ADGUST2BIP	31	AU-BZA4PC	27	EN-ANT1525BEM/40	45
AU-A1BTGBCWK	9	AU-ADGUST2BOV	31	AU-BZA4SN	27	EN-ANT1558B/40	45
AU-A1BTGECWK	9	AU-ADGUST2BPN	31	AU-BZA4W	27	EN-ANT1558BEM/40	45
AU-A1BTGSCWB	14	AU-ADGUST2BRB	31	AU-BZA6MW	25	EN-ANT1558BMS/40	45
AU-A1BTGSCWE	14	AU-ADGUTLBZ	31	AU-BZA6PC	25	EN-ANT1834B/40	45
AU-A1BTGUCW	13	AU-ADST1BIP/27	30	AU-BZA6SN	25	EN-ANT1834BEM/40	45
AU-A1BTGUCWK	9	AU-ADST1BIPDA/27	30	AU-BZA6W	25	EN-ANT1869B/40	45
AU-A1BTR2GW	17	AU-ADST1BIPV/27	30	AU-BZX7PC	5	EN-ANT1869BEM/40	45
AU-A1BTRC1	5	AU-ADST1BOV/27	30	AU-BZX7SN	5	EN-ANT1869BMS/40	45
AU-A1BTSP3W	11	AU-ADST1BOVDA/27	30	AU-CX7	23	EN-ANTL1238/40	48
AU-A4/30	27	AU-ADST1BOV/27	30	AU-DLEMB2B	70	EN-ANTL1555/40	48
AU-A4/40	27	AU-ADST1BPN/27	30	AU-ELG-150-24	61	EN-BA1222/30	46
AU-A42MW/30	27	AU-ADST1BPDA/27	30	AU-ELG-200-24	63	EN-BA1222/40	46
AU-A42MW/40	27	AU-ADST1BPNV/27	30	AU-FRLM10EMB	70	EN-BA1222CCT	47
AU-A42PC/30	27	AU-ADST1BRB/27	30	AU-LED1624CV	60	EN-BA1222CCTEM	47
AU-A42PC/40	27	AU-ADST1BRBDA/27	30	AU-LED1624IP	61	EN-BA1222EM/30	46
AU-A42SN/30	27	AU-ADST1BRBV/27	30	AU-LED2412IP	64	EN-BA1222EM/40	46
AU-A42SN/40	27	AU-ADST2BIP/27	30	AU-LED2424IP	64	EN-BA1222MS/30	46
AU-A42W/30	27	AU-ADST2BIPDA/27	30	AU-LED6012IP	64	EN-BA1222MS/40	46
AU-A42W/40	27	AU-ADST2BIPV/27	30	AU-LED6024IP	64	EN-BA1243/30	46
AU-A6/30	26	AU-ADST2BOV/27	30	AU-LEDD9024	60	EN-BA1243/40	46
AU-A6/40	26	AU-ADST2BOVDA/27	30	AU-LEDD9024	61	EN-BA1243CCT	47
AU-A62MW/30	26	AU-ADST2BOV/27	30	AU-MPRO1A/27	29	EN-BA1243CCTEM	47
AU-A62MW/40	26	AU-ADST2BPN/27	30	AU-MPRO1A/30	29	EN-BA1243EM/30	46
AU-A62PC/30	26	AU-ADST2BPDA/27	30	AU-MPRO1A/40	29	EN-BA1243EM/40	46
AU-A62PC/40	26	AU-ADST2BPNV/27	30	AU-MPRO2AMW/30	29	EN-BA1243MS/30	46
AU-A62PROMW/30	25	AU-ADST2BRB/27	30	AU-MPRO2AMW/40	29	EN-BA1243MS/40	46
AU-A62PROMW/40	25	AU-ADST2BRBDA/27	30	AU-MPRO2APC/30	29	EN-BA1533/30	46
AU-A62PROPC/30	25	AU-ADST2BRBV/27	30	AU-MPRO2APC/40	29	EN-BA1533/40	46
AU-A62PROPC/40	25	AU-ADTLBZ	30	AU-MPRO2ASN/30	29	EN-BA1533CCT	47
AU-A62PROSN/30	25	AU-AP600MW	29	AU-MPRO2ASN/40	29	EN-BA1533CCTEM	47
AU-A62PROSN/40	25	AU-AP600PC	29	AU-MPRO2AW/30	29	EN-BA1533EM/30	46
AU-A62PROW/30	25	AU-AP600SN	29	AU-MPRO2AW/40	29	EN-BA1533EM/40	46
AU-A62PROW/40	25	AU-AP600W	29	AU-MPRO5A/30	29	EN-BA1533MS/30	46
AU-A62SN/30	26	AU-AP86MW	25	AU-MPRO5A/40	29	EN-BA1533MS/40	46
AU-A62SN/40	26	AU-AP86PC	25	AU-MPROTLBK	29	EN-BA1563/30	46
AU-A62W/30	26	AU-AP86SN	25	AU-MPROTLW	29	EN-BA1563/40	46
AU-A62W/40	26	AU-AP86W	25	AU-X7/30	22	EN-BA1563CCT	47
AU-A6PRO/30	25	AU-BZ600BLK	29	AU-X7/40	22	EN-BA1563CCTEM	47

For terms & conditions visit [auroralighting.com](http://auroralighting.com)



## Index

Cat. No.	Pg.	Cat. No.	Pg.	Cat. No.	Pg.	Cat. No.	Pg.
EN-BA1563EM/30	46	EN-CH1062KIT	67	EN-HBE100/40	52	EN-ST524IP/60	63
EN-BA1563EM/40	46	EN-CH1091KIT	67	EN-HBE150/40	52	EN-STIPCK5	63
EN-BA1563MS/30	46	EN-CH1092KIT	67	EN-HBE200/40	52	EN-SU1230B/40	41
EN-BA1563MS/40	46	EN-CHC1	67	EN-HBL60A	52	EN-SU1230BDA/40	41
EN-BA1839/30	46	EN-CHC2	67	EN-HBL60B	52	EN-SU1230BV/40	41
EN-BA1839/40	46	EN-CHPC1CL1	67	EN-LED12024	60	EN-TF6060B/40	42
EN-BA1839CCT	47	EN-CHPC1CL2	67	EN-LED7524	60	EN-TF6060B5/40	42
EN-BA1839CCTEM	47	EN-CHPC1FR1	67	EN-LEDD15024	62	EN-TF6060BDA/40	42
EN-BA1839EM/30	46	EN-CHPC1FR2	67	EN-LPEM2	40	EN-TF6060BV/40	42
EN-BA1839EM/40	46	EN-DDL134CCT	35	EN-LPP1230/40	40	EN-TF6060CCT	43
EN-BA1839MS/30	46	EN-DDL134CCTDA	35	EN-LPP1230/50	40	EN-TF6060CCT5	43
EN-BA1839MS/40	46	EN-DDL134CCTV	35	EN-LPP1230DA/40	40	EN-TF6060CCTDA	43
EN-BA1873/30	46	EN-DDL186CCT	35	EN-LPP1230DA/50	40	EN-TF6060CCTV	43
EN-BA1873/40	46	EN-DDL186CCTDA	35	EN-LPP1230V/40	40	EN-WL10BLK/40	56
EN-BA1873CCT	47	EN-DDL186CCTV	35	EN-LPP1230V/50	40	EN-WL10W/40	56
EN-BA1873CCTEM	47	EN-DDL188CCT	35	EN-LPP1260/40	40	EN-WL18BLK/40	56
EN-BA1873EM/30	46	EN-DDL188CCTDA	35	EN-LPP1260/50	40	EN-WL18W/40	56
EN-BA1873EM/40	46	EN-DDL188CCTV	35	EN-LPP1260DA/40	40		
EN-BA1873MS/30	46	EN-DDL258CCT	35	EN-LPP1260DA/50	40		
EN-BA1873MS/40	46	EN-DDL258CCTDA	35	EN-LPP1260V/40	40		
EN-CH1001	67	EN-DDL258CCTV	35	EN-LPP1260V/50	40		
EN-CH1002	67	EN-DDL358CCT	35	EN-LPP6060/40	40		
EN-CH100EC1	67	EN-DDL358CCTDA	35	EN-LPP6060/50	40		
EN-CH100EC2	67	EN-DDL358CCTV	35	EN-LPP6060DA/40	40		
EN-CH1011	67	EN-DGU35/30	36	EN-LPP6060DA/50	40		
EN-CH1012	67	EN-DGU35/40	36	EN-LPP6060V/40	40		
EN-CH101EC1	67	EN-DLB152AD/30	32	EN-LPP6060V/50	40		
EN-CH101EC2	67	EN-DLB152AD/40	32	EN-ST1024/27	60		
EN-CH1021	67	EN-DLB152ADDA/30	32	EN-ST1024/30	60		
EN-CH1022	67	EN-DLB152ADDA/40	32	EN-ST1024/40	60		
EN-CH102EC1	67	EN-DLB152ADV/30	32	EN-ST1024A	60		
EN-CH102EC2	67	EN-DLB152ADV/40	32	EN-ST1024B	60		
EN-CH1031	67	EN-DLB152D/30	32	EN-ST1024C	60		
EN-CH1032	67	EN-DLB152D/40	32	EN-ST1024IP/27	61		
EN-CH103EC1	67	EN-DLB152DDA/30	32	EN-ST1024IP/30	61		
EN-CH103EC2	67	EN-DLB152DDA/40	32	EN-ST1024IP/40	61		
EN-CH1041	67	EN-DLB152DV/30	32	EN-ST1024IPCK	61		
EN-CH1042	67	EN-DLB152DV/40	32	EN-ST524/30	62		
EN-CH104EC1	67	EN-EMLD5	70	EN-ST524/40	62		
EN-CH104EC2	67	EN-EMLD5ST	70	EN-ST524/60	62		
EN-CH1051	67	EN-FW1	58	EN-ST524A	62		
EN-CH1052	67	EN-FWB2B	58	EN-ST524B	62		
EN-CH105EC1	67	EN-FWB2W	58	EN-ST524C	62		
EN-CH105EC2	67	EN-GU35/30	36	EN-ST524IP/30	63		
EN-CH1061KIT	67	EN-GU35/40	36	EN-ST524IP/40	63		



### **UK Head Office & Distribution**

6 Little Burrow, Burrowfields  
Welwyn Garden City  
AL7 4SW  
United Kingdom

**Tel: 01707 228 700**

**Fax: 0800 8030 519**

Sales & Distribution Partner

**[auroralighting.com](http://auroralighting.com)**